


## CRC (Cable Relief Clamp)

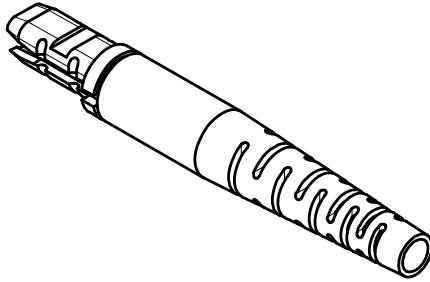

### Characteristics


- Field installation
- Direct fixation to ACS base
- Strain relief of the installed cable
- 2 different sizes available
- Up to 3mm cable diameter

### Technical data


Attribute	Value
Dimensions (L x Ø)	23.3 x 5Ø mm 24.5 x 6.8 Ø mm
Cable Dimension (Ø)	Small Form Factor Big Form Factor
	Up to 2.1 mm cable diameter Up to 3.0 mm cable diameter
Pull Force	Approximately 60 N <sup>1)</sup>
Material	PBT
Weight (SFF) (BFF)	0.2g 0.4g
Colour	Black
Temperature resistance Celsius (Short term) Fahrenheit	-30° to +200°C, -22° ... +392°F,
Temperature resistance Celsius (Long term) Fahrenheit	-30° to +80°C, -22° ... +176°F,
Flammability rating	UL94 HB
UV resistance	Resistant
Free of halogen	Yes
Chemical resistance	Good
RoHS requirements	Fully compliant

Note: <sup>1)</sup> The pull force depends directly on the amount of aramid used in the chosen cable. The CRC approach is designed for quick onsite installation without massive pull forces.

**Technical drawing(s)**

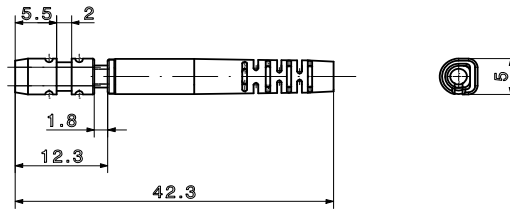

Small Form Factor CRC

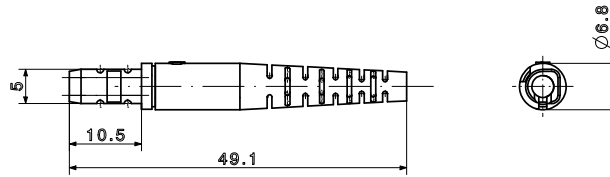

Big Form Factor CRC

**Descriptive code**

Item nr.	Descriptive code	Description
85017011	CRC2-CableReliefClamp_SFF	CRC for up to 2.1 mm cable diameter
84034687	BOOT-SFF-1.6-2.5-BLACK	Boot for SFF CRC
23014820	BOOT STD 2.7-3.2_BK	CRC for up to 3.0 mm cable diameter
85017010	CRC3-CableReliefClamp_BFF	Boot for BFF CRC

**Additional documents**

Document	Doc-no.
Data sheet ACS Base	DOC-0000603675

**HUBER+SUHNER AG**  
 Fiber Optics Division  
 9100 Herisau  
 Switzerland  
 Tel. +41 (71) 353 41 11  
 Fax +41 41 (71) 353 4647

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 and IRIS.

**Note**

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.