


RADOX® Automotive Connectivity System (1Pole)

Application

High-voltage connections for electric vehicles

Benefits

- High ampacity
- Compact
- 360° screen connection
- Vibration-resistant
- Resistant to extreme temperatures
- Corrosion-resistant
- IP67 & IP6K9K

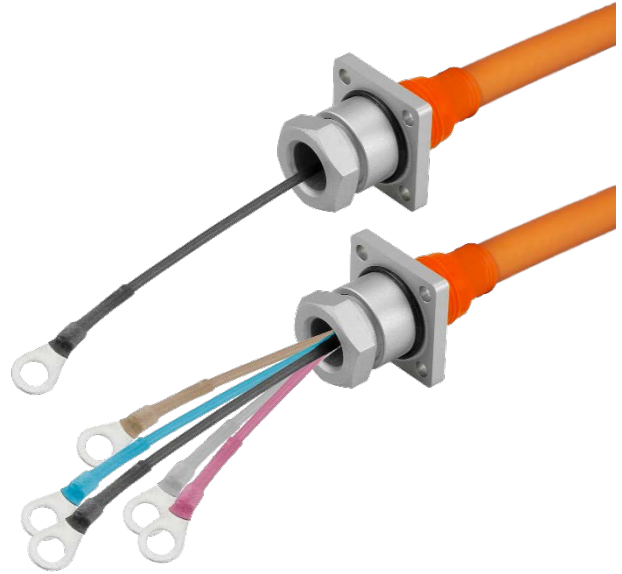

Technical Data

Electrical Data

Voltage rating	1000 V DC
Rated current	up to 450 A @ 85°C (95mm ²)
Screen resistance	< 7 mΩ
Insulation resistance	> 100 MΩ

Mechanical Data

Vibration and shock resistance	ISO16750-3 (300 m/s ² ; 6 ms; half-sinusoidal)
--------------------------------	---

Environmental Data

Operating Temperature Range	-40°C to +125°C
Sealing	IP6K9K / IP67
Corrosion resistance	336 hours (ISO16750-4; severity 4)

Available for

Cable Cross Section	Single-Core: 2.5, 4, 6, 8 , 10, 12, 16, 20 , 25, 35, 40 , 50, 60 , 70, 95mm ²
---------------------	--

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 und IRIS

HUBER+SUHNER AG
 Market Unit Automotive
 CH-8330 Pfäeffikon
 Tel. +41 (0)44 952 22 11
 www.hubersuhner.com

Waiver

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.