

GPS-over-Fiber GPSof4 – 1.5 GHz (RX)

Description

The GPS-over-Fiber Link (GPSof4 – 1.5 GHz) offers a very high stability in addition to excellent performance in phase noise and frequency jitter in applications such as remote antenna connection in GPS receiving systems.

Features

- For GPS and Glonass (L1 and L2 bands)
- No external control circuits required
- Analog signal to optical convert and back

Applications

- Reference signal distribution (time and locations)
- Antenna remoting
- Inter-facility communication links



Order Information

Item Description	Item Number
GPSof4 - 1.5 GHz (RX) [L1 only]	85065809
GPSof4 - 1.5 GHz (RX) [L1+L2]	85072907

Electrical Data


Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case Temperature T _c , unless otherwise specified					
Frequency range	MHz	1218		1615	
Gain	dB	4	7	10	
Gain flatness	dB		< 2		
Noise figure	dB		14		
Spurious-free dynamic range	dB Hz ^{2/3}		100		
Max. input at 1dB compression	dBm		-20		
Max. input power for no damage	dBm		+15		
VSWR (input and output)	dB		< 1.8		
OIP3	dBm		+ 7		
Time Delay	ns		55		
Supply voltage V _S	Transmitter VDC	+ 12	+ 12	+ 15	<150 mA
Supply voltage V _S	Receiver VDC	+ 12	+ 12	+ 15	<100 mA
Temperature range (OTR)	Operating °C	-40		+ 85	
	Storage °C	-40		+ 85	
RF input impedance	ohm	50			
Mass receiver	g	480			
Dimensions receiver	mm	160 x 90 x 27			
RF connectors		QMA / SMA female			

Optical Data

Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case Temperature T _c , unless otherwise specified					
Fiber optic connectors		FC/APC			
Fiber		Single mode fiber 9/125 um			
Optical power in fiber	mW	6	8	10	
Side mode suppression ratio	dB	30	40		

GPS-over-Fiber GPSof4 – 1.5 GHz (RX)

Dimensions (mm)

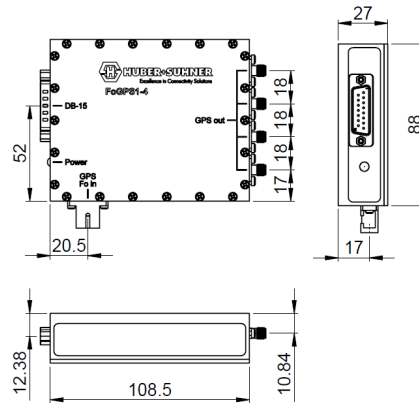

Additional Information

- All modules are RoHS Compliant
- All modules are EMV protected
- DIN 35 brackets are delivered with each module. Other brackets available upon request
- MIL and other certifications are possible upon request.
- Various racks and enclosures available
- All modules are single packaged


Important catalogue links

RF Cables: <http://literature.hubersuhner.com/Technologies/Radiofrequency/RFCablesEN/>

RF Connectors: <http://literature.hubersuhner.com/Technologies/Radiofrequency/RFCConnectorsEN/>

FO Standard Assemblies: <http://literature.hubersuhner.com/Technologies/Fiberoptics/FOcableassembliesEN/>

Application Notes

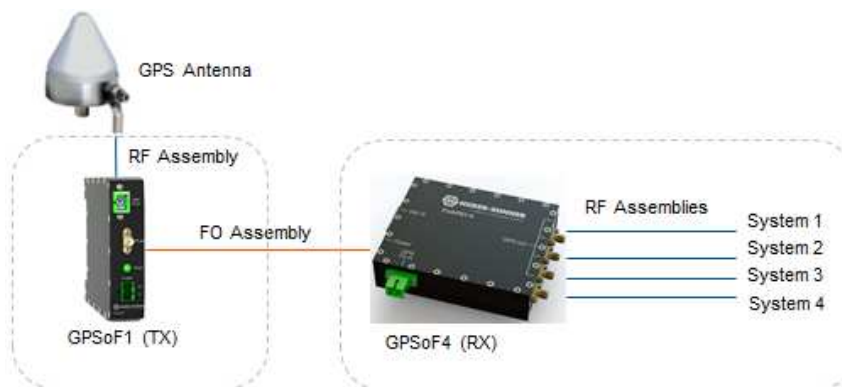

All of the products required for a GPS-over-Fiber solution are available at HUBER+SUHNER.

Potential Applications

- Ideally suited to vehicles, ships and other structures such as offshore structures that require a single GPS source to be distributed to multiple systems.

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 and IRIS

www.hubersuhner.com

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.