DATA SHEET

Optibox

OTB 4i, No lock, empty, with standard product configuration

OTB04i0-00S00P000xx0000000O-KK

Properties

- UV resistant enclosure
- Radius protected fiber management



General data	
Product family	Optiboxes
Box type	Optibox 4i
Application Area	Outdoor

Mechanical data	
Weight	0.436 kg
Dimensions (LxWxH)	250mm x 150mm x 46mm
Impact resistance	IK08
Diameter range input cable	3 mm ... 16mm
Lock	No Lock
Housing material	Plastic
Housing colour	Graphite grey (RAL 7024)
Capacity of splices	16 pcs
Capacity of adapters	4 pcs


Environmental data	
Chemical resistance	good
Operation temperature	-46 °C ... 81 °C
Ingress protection (IP Rating)	IP67
Flammability rating	UL 94 V-0
UV resistance	Yes

Optibox

OTB 4i, No lock, empty, with standard product configuration

OTB04i0-00S00P000xx0000000O-KK

Technical drawing

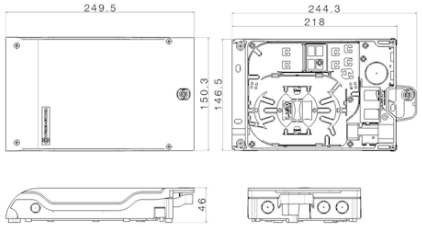

Ordering Information Table

Item number	Item description
84076039	OTB04i0-00S00P000xx0000000O-KK

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P17669 / Date of publication: 08.07.2025 / uncontrolled copy