
DATA SHEET

Power cables
6 core Power Cable, 16mm2, Class 5, CPR B2ca
06x16mm2CL5-P09-LSFH-CE#B

Properties

- Flexible power cable with low bending radius and excellent cable routing properties
- Aluminum foil shielding and earth conductor for grounding
- Low smoke free of halogen thermoplastic jacket material

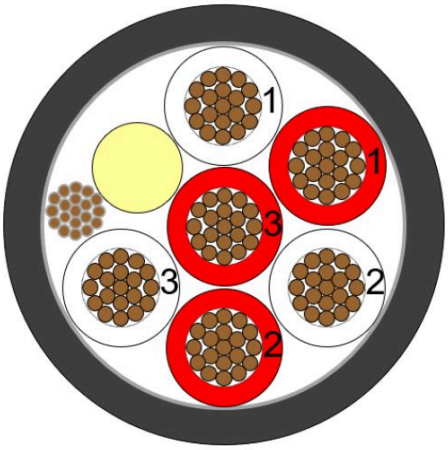

General data	
Cable type	Power cables
Operation temperature	-40 °C ... 90 °C

Conductor		
General	Number of conductors	6 pcs
	Cross section	16 mm²
Conductor class	Conductor class standard	IEC 60228
	Conductor class	Class 5
Insulation	Material	XLPE
	Diameter	6.3 mm
Conductor electrical values	Resistance of core	1.21 Ω/km
	Resistance of core temperature	20 °C
	Current rating	57.2 A
	Operating voltage	0.6 kV AC / 1kV DC
	Test voltage	8.4 kV DC
	Test voltage duration	5 min

Cable jacket		
Outer jacket	Material	LSFH™ thermoplastic TPE-HF
	Diameter	22.7 mm
	Thickness	1.8 mm
	CPR standard	EN 50575:2014+A1:2016
	CPR class	B2ca-s1a,d1,a1

Ordering Information Table	
Item number	Item description
85202646	06x16mm2CL5-P09-LSFH-CE#B

Power cables

6 core Power Cable, 16mm2, Class 5, CPR B2ca

06x16mm2CL5-P09-LSFH-CE#B

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P28505 / Date of publication: 19.11.2026 / uncontrolled copy