
DATA SHEET

Fiber Optic Cables
Empty Tube TPU Ø 0.9mm-0.4mm
00-0/HZ-...9-4

Properties

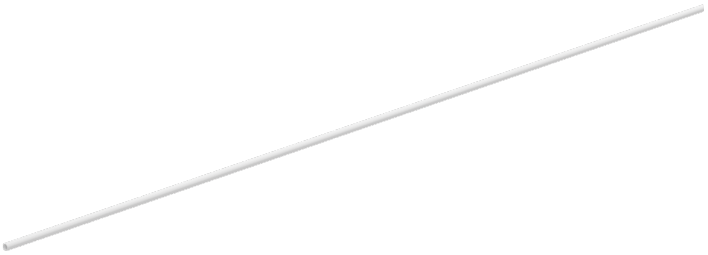

Jacket colour

Construction		
Tube	Diameter	0.9 mm
Outer jacket	Material	TPU
	Diameter	0.94mm

Environmental data		
Temperature	Standard	IEC 60794-1-22 F12
	During installation	-25 °C ... 60 °C
	In service	-40 °C ... 85 °C
	In storage	-40 °C ... 85 °C
Fire characteristics	Standard Condition Characteristics	IEC 60754-1 Jacket material Halogen acid gas
	Standard Condition Characteristics	IEC 60754-2 Jacket material Degree of acidity

Mechanical data		
Weight		approx. 0.7 g/m

Colours	
Tube	Transparent
Standard outer jacket colours	Transparent

Fiber colour code

	1	2	3	4	5	6	7	8	9	10	11	12
H+S Standard	Red	Green	Yellow	Blue	White	Violet	Orange	Black	Grey	Brown	Heather violet	Turquoise
DIN	Red	Green	Blue	Yellow	White	Grey	Brown	Violet	Turquoise	Black	Orange	Heather violet

HUBER+SUHNER

Fiber Optic Cables

Empty Tube TPU Ø 0.9mm-0.4mm

00-0/HZ-...9-4

Fiber colour code												
TIA	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Heather violet	Turquoise
IEC	Blue	Yellow	Red	White	Green	Violet	Orange	Grey	Turquoise	Black	Brown	Heather violet

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P7418 / Date of publication: 13.05.2026 / uncontrolled copy