DATA SHEET

RFoF

Receiver, 6 GHz, DIN Rail, 1 RF OUT, 1 FO IN

RFoF1 - 6GHz (RX)

Properties

- Wide bandwidth from 20 MHz to 6 GHz
- Plug and Play: No external control required
- Analog RF signal conversion to optical and back



General data	
Product family	RFoF standard receiver module
Suitable Products	RFoF1 - 6GHz (TX), 85085011
	Power supply: PS -12W Phoenix 2pol-AC to DC 85272725
Module type	DIN Rail module

Electrical data	
Frequency range	20 MHz ... 6000 MHz
Link gain typical	7 dB
Frequency response flatness	+/- 3 dB
Link noise figure typical	1 GHz: 16 dB
	2 GHz: 19 dB
	4 GHz: 30 dB
	6 GHz: 30 dB
VSWR	< 1.9
Link spurious free dynamic range SFDR3 typical	1 GHz: 118 dB/Hz$^{2/3}$
	2 GHz: 112 dB/Hz$^{2/3}$
	3 GHz: 108 dB/Hz$^{2/3}$
	6 GHz: 100 dB/Hz$^{2/3}$
Input 3rd order intercept point typical	1 GHz: 19 dBm
	4 GHz: 13 dBm
	6 GHz: 7 dBm
Power connector	2-pole PCB multiconnector
Supply voltage range	11 V DC ... 14 V DC
Supply voltage typical	12 V DC
Supply current typical	140 mA

RFoF

Receiver, 6 GHz, DIN Rail, 1 RF OUT, 1 FO IN

RFoF1 - 6GHz (RX)

Mechanical data	
Weight	0.27 kg
Weight in lbs	0.6 lbs
Dimensions (LxWxH)	90mm x 95mm x 23mm

Environmental data	
Storage temperature	-40 °C ... 85 °C
Operation case temperature	-20 °C ... 65 °C

Optical data	
Time delay	6 ns
Optical input power damage limit	9 dBm

Output of RF connection	
Product family RF connector	SMA
Gender	Female
Amount of RF connectors	1 pcs


Input of FO connection	
Product family FO connector	FC APC
Amount of FO Connectors	1 pcs
Fiber type	Singlemode

RFoF

Receiver, 6 GHz, DIN Rail, 1 RF OUT, 1 FO IN

RFoF1 - 6GHz (RX)

Technical drawing

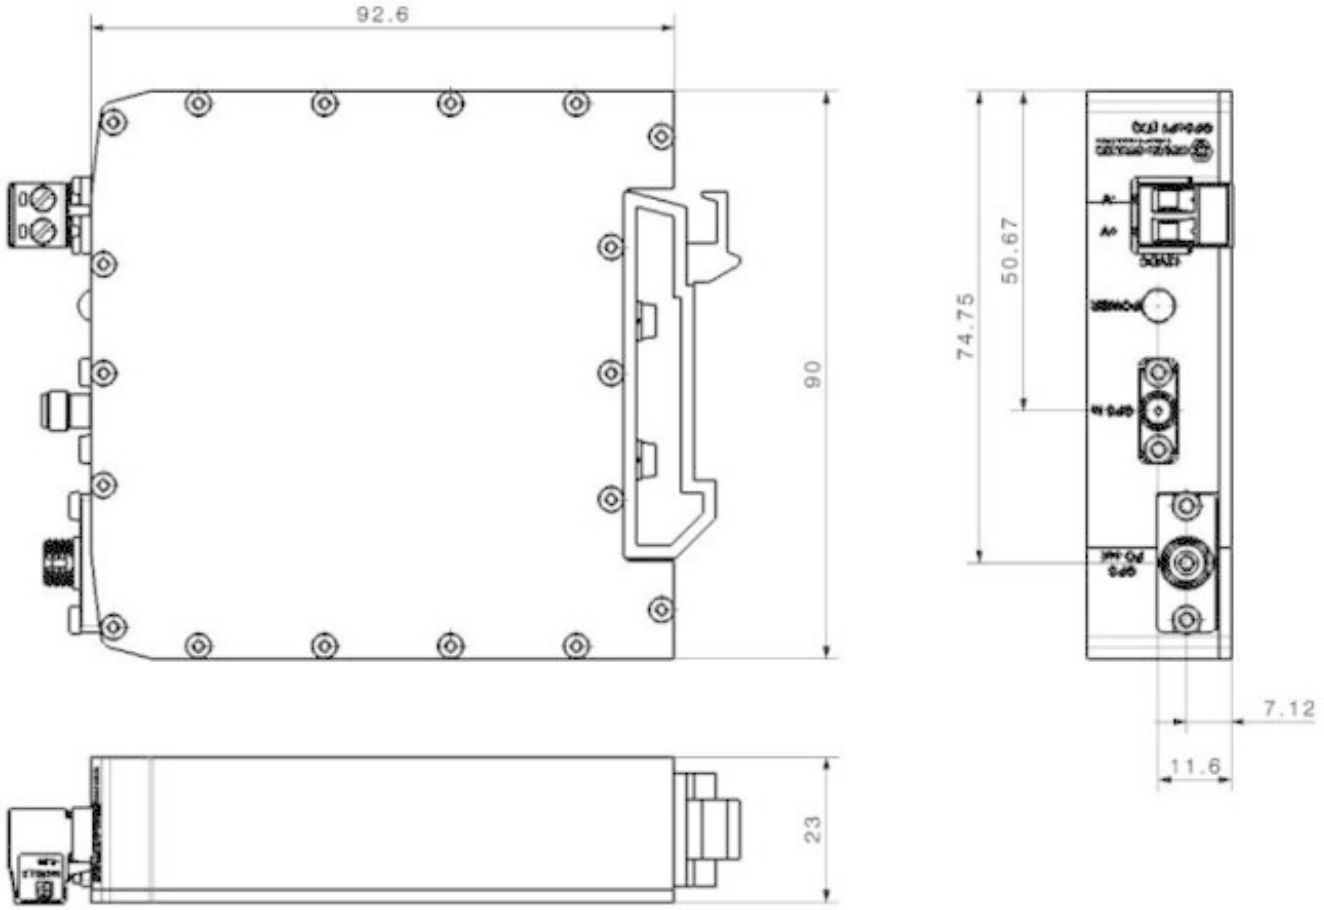

LED Definition		
LED State	**Transmitter**	**Receiver**
Red		Optical input power < -3 dBm
Yellow		Optical input power > -3 dBm

Scope of delivery	
Scope of delivery	Power supply is not included; compatible option is listed under suitable products.

Ordering Information Table	
Item number	Item description
85085013	RFoF1 - 6GHz (RX)

RFoF

Receiver, 6 GHz, DIN Rail, 1 RF OUT, 1 FO IN

RFoF1 - 6GHz (RX)

Additional Information

Total link time delay calculation: Total delay [ns] = time delay TX + RX [ns] + time delay RX [ns] + time delay single mode fiber 1310nm [ns/m] * link length [m]
Example 100m link delay = 6 ns + 6 ns + 100m * 4.9 ns/m = 502 ns

Link values are specified with transmitter RFoF1 - 6GHz (TX) 85085011

All specifications measured at 25°C case temperature unless otherwise stated

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P43665 / Date of publication: 30.07.2026 / uncontrolled copy