

# Revolutionise your data center management with the Ribbon End-to-End solution

In today's digital world, gaining a competitive edge means embracing innovation. The Ribbon End-to-End Solution from HUBER+SUHNER sets new standards for data center management. With mass-fusion splicing, a space-saving design, and cutting-edge technology, we enable unprecedented efficiency, reduced downtime, and faster deployments.



## Optimized Total Cost of Ownership (TCO)

The space-saving design enhances future scalability by increasing port density in racks and simplifying installation efforts.



## Faster deployment and roll-out

Mass-fusion splicing reduces splicing time, while the dry cable design eliminates the need for gel, streamlining cable processing.
Optimized coiling and placement options further enhance cable management.



## Higher operational efficiency

Fewer technicians are needed due to easy processing; therefore, reducing maintenance costs with improved handling. The system integrates seamlessly with LISA and IANOS for streamlined management.

## Components of the Ribbon End-to-End Solution



OptiRibbon and OptiSlim cables are engineered for mass-fusion splicing and feature superior stripping properties for quick and hassle-free processing.



The LISA is a trusted, high-density fiber management system which is designed to maximize fiber efficiency. Optical Distribution Frame (ODF) LISA can support up to 28,000 fibers, making it the perfect choice for meetme rooms and high-capacity distribution zones.



The IANOS Connectivity System is a cuttingedge modular fiber management platform designed for top-of-rack, backbone, and cross-connect applications in 19 inch cabinets



The Ribbon Splice Box (RSB) is a highly efficient splice-through panel designed for ODF and 19 inch cabinets, offering outstanding splicing density.

# Ribbon End-to-End Solution at a glance


Our Ribbon End-to-End solution, complements our data center and central office portfolio with ribbon fibers ranging from building entry point to the white space.



LISA ribbon system consists of chassis and cassettes containing OptiRibbon fibers that can be mounted in 300 mm deep racks to create optical distribution frames.



IANOS ribbon contains modules equipped with OptiRibbon fibers, which are added to IANOS chassis.

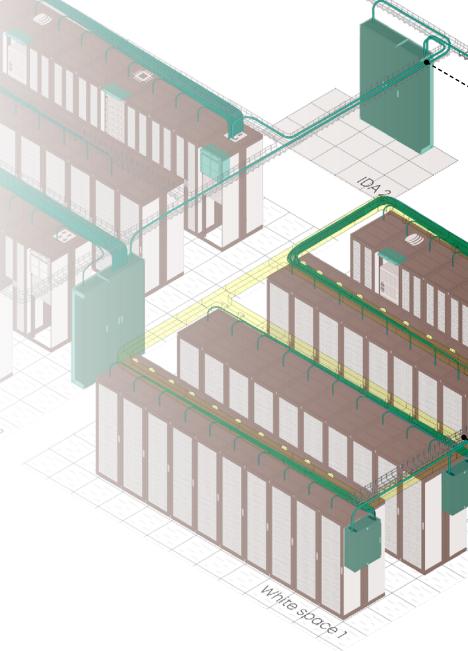




RSB allows to splice incoming flat, flexible ribbons or loose from outside cables with flexingers and loose fibers for inter applications, sin-

cabinets.

OptiRibbon OptiSlim is a family of fiber optic cables with flexible ribbons and loose fibers for data center applications, single-stranded (12 or 24 fibers) or breakout (from 24 up to 576 fibers).

Single cables

· OptiRibbon cables 12-24 fibers

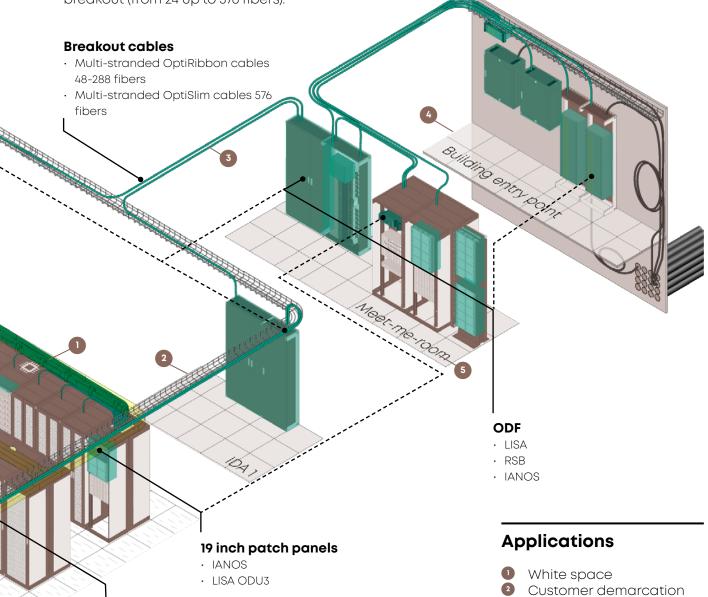

Fiber backbone

Meet-me-room

Building entry point

## Featuring OptiRibbon cables

Reduce installation time and space in pathways with OptiRibbon cables. Cables are designed to fit perfectly to fiber management systems like RSB, LISA and IANOS. They are easy to splice and can be neatly coiled inside cassettes and modules, saving time and hassle.

OptiRibbon Simplex 12-24

- One 12- or 24- fiber strand, 1 or 2 ribbons
- Small, robust but soft

OptiRibbon Simplex 12-24

• Fast preparation and installation

#### **Applications**



#### **Customer demarcation**

OptiRibbon DJ or simplex cables can be used to connect customer edge equipment from the white space to the distributor.



#### White space


OptiRibbon DJ or simplex cables can be used to connect customer equipment inside the white space.



#### Fiber backbone


OptiRibbon Breakout 48-288 cables can be used to connect various distributors.

#### OptiRibbon DJ 12-24




- One 12- or 24- fiber strand, 1 or 2 ribbons
- Small, robust but soft
- Fast preparation and installation

#### **OptiRibbon Breakout 48-288**



- Multiple 12- or 24- fiber strands, 1 or 2 ribbons each
- Small, robust but soft
- 48 to 288 fibers

Up **to 60 % faster** splicing with OptiRibbon. Over the course of a full workday, this adds up to huge time savings helping you **get more done** with fewer resources.

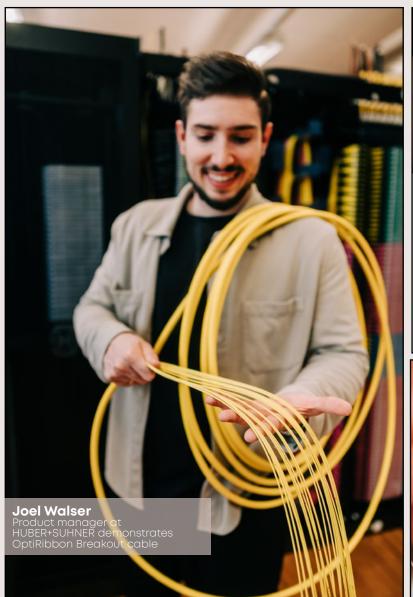







#### Recommended for High-Safety Buildings

For better fire safety, the cable industry recommends using B2ca-class cables in buildings and at least Ccaclass cables in high-safety structures like data centres.



## Splice OptiRibbon fast and easy

OptiRibbon enables faster mass fusion splicing, reducing downtime and maintenance in data centers.

OptiRibbon can be

OptiRibbon can be successfully spliced using single fusion splicing as well.



#### **FMS** compatible


The cable construction and fiber is compatible with FMS (fiber management systems), like LISA and IANOS and can be easily spliced and coiled inside cassettes and modules.


## **Applications**

## OptiRibbon DJ on a white space


Use 12- or 24- OptiRibbon DJ for interconnection of tenants's active equipment on a white space.

Due to faster splicing, more permanent links can be installed at the same time compared to a conventional splicing approach.

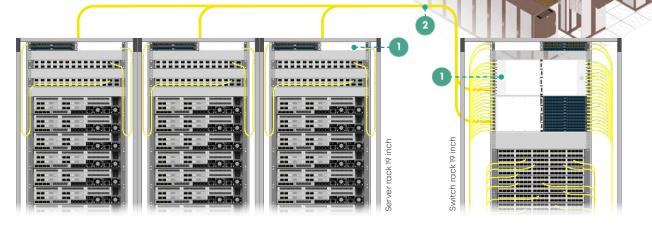

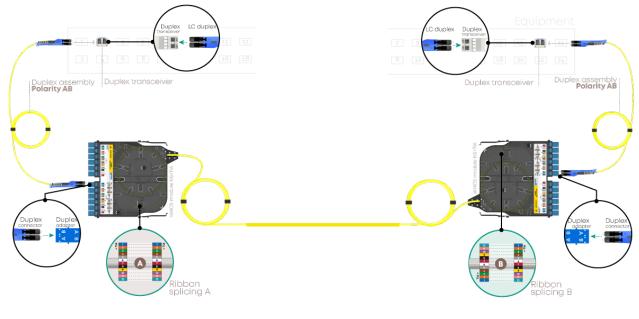







#### OptiRibbon DJ for customer demarcation


Use the 12- or 24-OptiRibbon DJ to connect end customers to the fiber backbone.

Planning pre-terminated cables can be a tedious task, but ribbon splicing simplifies the process. Deploy the cable without pre-measuring, cut it to the exact length needed, and splice it inside the module. The result is a permanent link with greater optical performance.

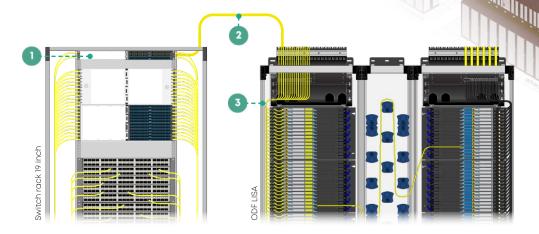


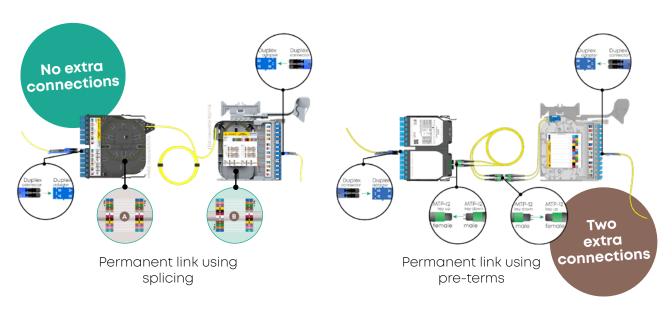








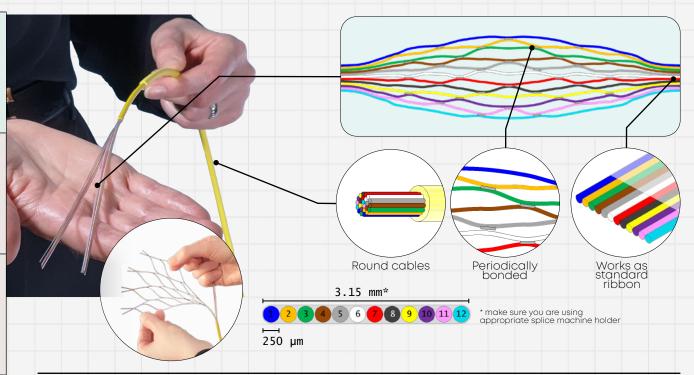

Mass fusion splicing of different fiber types

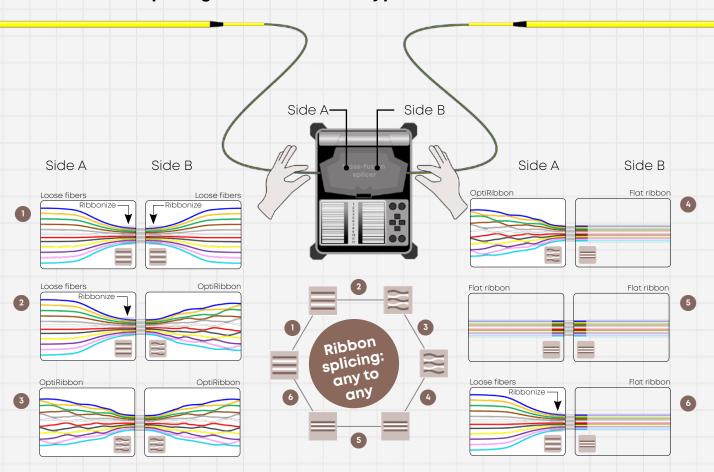

#### Benefits of using OptiRibbon fiber

The approximate timing of single splicing a 24x fiber by an experienced technician

- Stripping
- 2 Cleaning
- Cleaving
- Fusion
- Protection
- 6 Coiling

Total time: 45 min








45 min.










30 min. time saved














- Stripping
- CleaningCleaving
- 4 Fusion
- 5 Protection
- Coiling

Total time: 15 min









## **Applications**


#### OptiRibbon Breakout in fiber backbone

The OptiRibbon Breakout is used to connect multiple

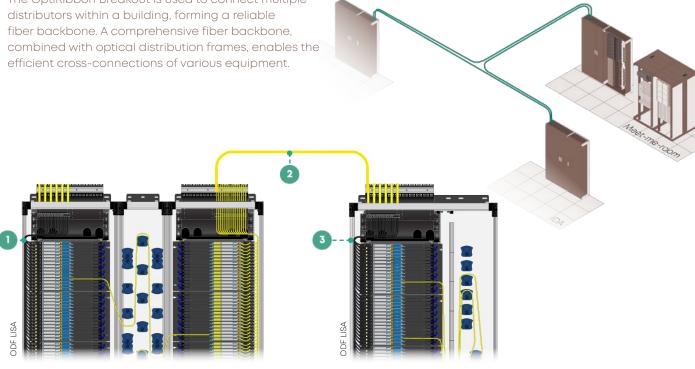


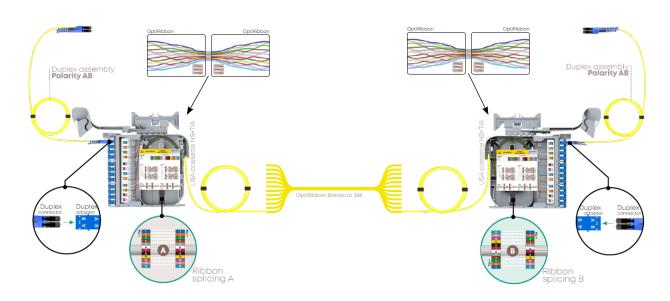








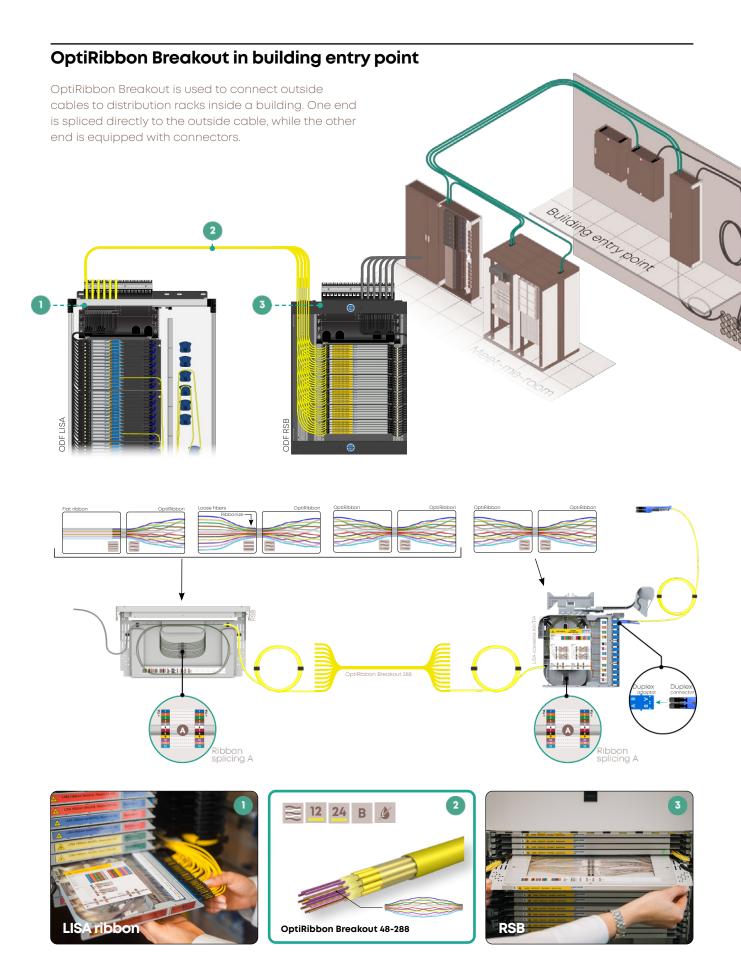

## **Featuring OptiSlim cables**

OptiSlim cables, the most compact in the Opti portfolio, contains loose fibers rather than a ribbon accomodating a higher fiber count than the OptiPack and OptiRibbon.

When using ribbon splicing, terminating these cables is significantly faster than single-fiber splicing, although ribbonizing is required.

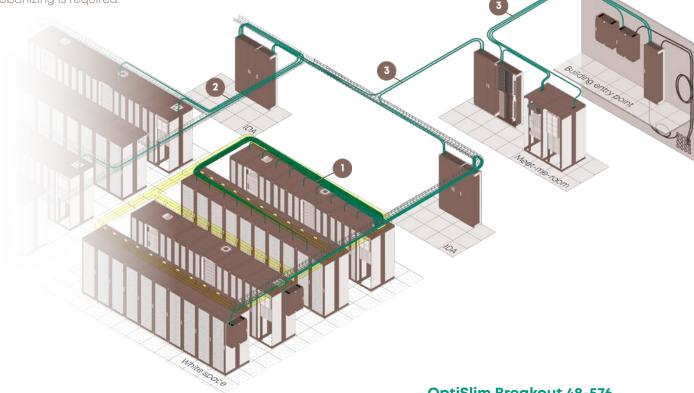

#### **Applications**



OptiSlim cables can be used to connect customer edge equipment from the white space to the distributor.


White space

OptiSlim cables can be used to connect customer equipment inside the white space.

#### Fiber backbone


OptiSlim Breakout 48-576 cables can be used to connect various distributors.

#### **OptiSlim Breakout 48-576**



- Compact and even softer
- Ideal for ribbonization, mass-fusion splicing
- 48 to 576 fibers

OptiSlim cables are the most compact, offering high capacity and fast termination with ribbon splicing.

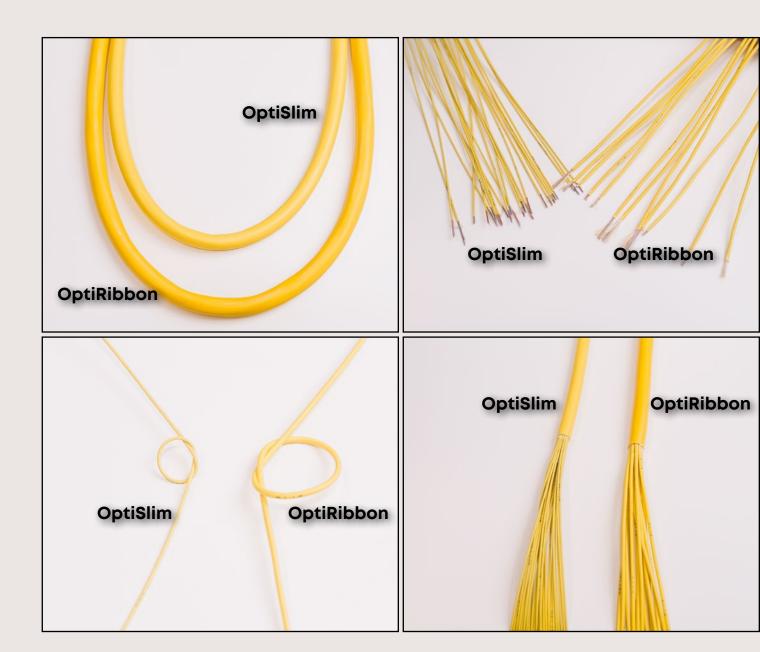



#### Recommended for High-Safety Buildings

For better fire safety, the cable industry recommends using B2ca-class cables in buildings and at least Ccaclass cables in high-safety structures like data centres.



#### **Density**

OptiSlim's diameteroptimized design achieves
higher packing density,
enabling the bundling of
more fibers in a compact
space. This efficiency allows
for more cables and links in
data centers, where space
is often limited.




#### Is compatibile with FMS


The OptiSlim cable construction is compatible with various FMS. When combined with ribbonizing and mass fusion splicing, it enables rapid installation.

## **Applications**

#### OptiSlim Breakout in cross-connect cabling in white spaces


OptiSlim Breakout, similar to OptiRibbon Breakout cables, can serve multiple server racks with a single cable. This reduces cable pulling time, reduces space in cable pathways and improve attenuation performance in the fiber optic link by splicing fibers.

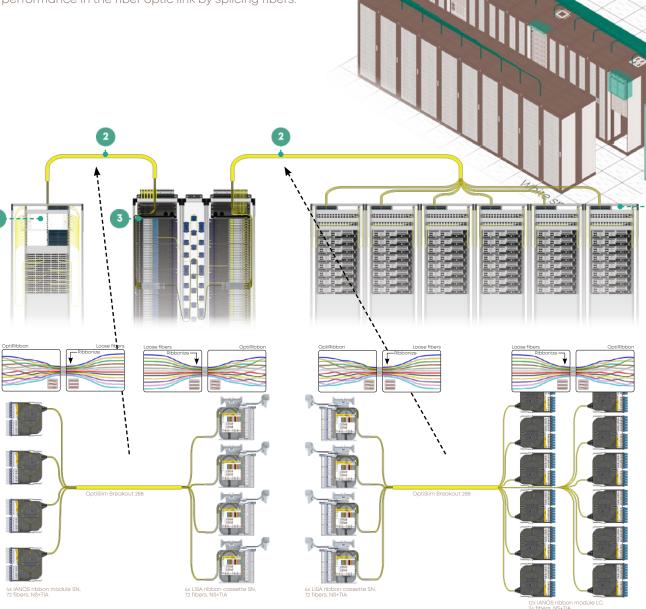









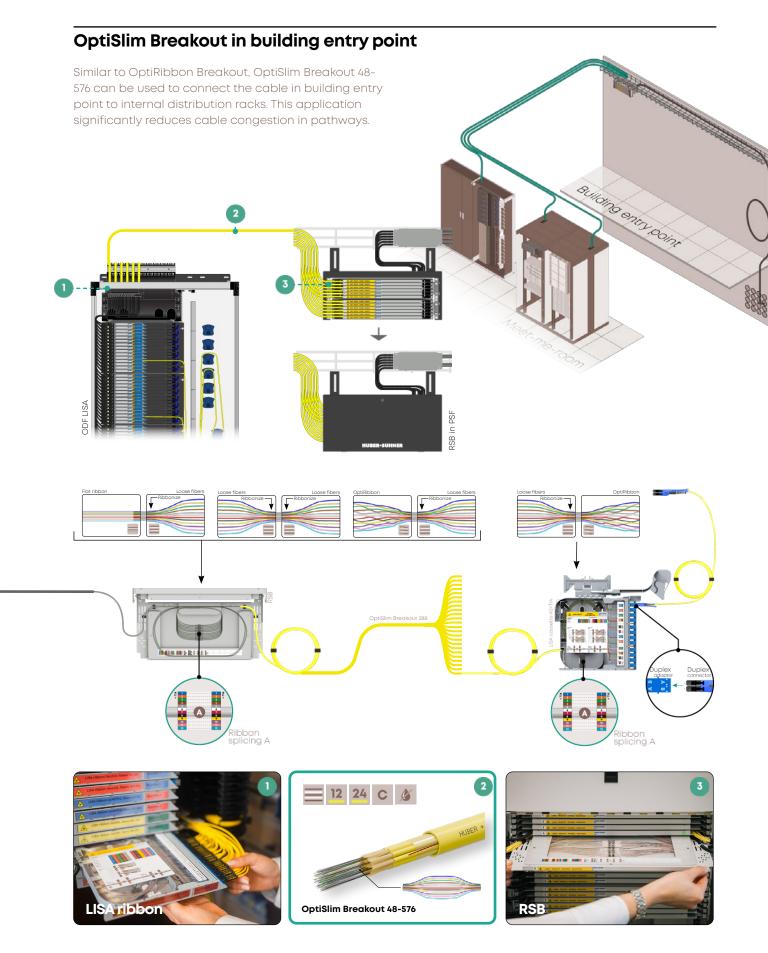

## **Technical overview**

#### **Ribbonizing loose fibers**





Approximate time of an experienced technician completing a 12-fiber ribbonization

0	Release fibers
2	Colour sorting, ac- cording TIA-598
3	Applying glue

Glue spreading


Drying

Total time: 2 min














Loose fibers can be ribbonized and then spliced using mass splicing. This method significantly saves time compared to splicing individual fibers, especially when dealing with high fiber counts.




**Disposable 12 fibers ribbonizer tool** 85012951 TOOL-MT-GLUE-RIBBON-DIE




#### Comparison of Cable Transects - OptiRibbon vs OptiSlim

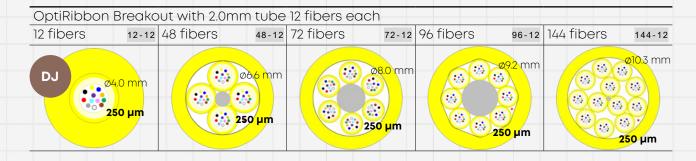

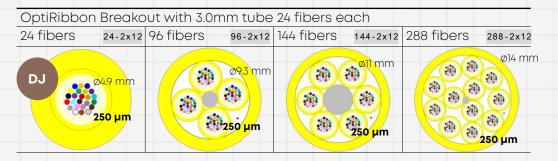


OptiSlim Breakout with 1.7mm tube 12- or 24- fibers each									
48 fibers	48-12	72 fibers	72-12	144 fibers	144-12	288 fibers	288-12	576 fibers	576-24
250	3 mm	***************************************	Ø8 mm	(a) (b) (c) (c) (c) (c) (c) (c) (c) (c) (c) (c	250 µm		Ø12.7 mm	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	9 9

#### Optimization of fiber pathways capacity with Opti-cables




The capacity of pathways can be greatly enhanced by utilizing **compact Opti-** cable types.

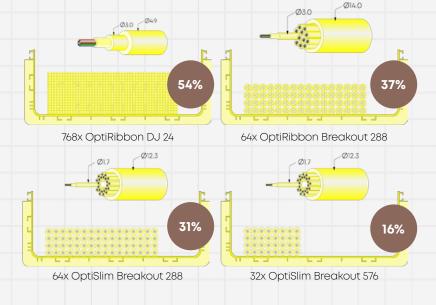

## **Order Guide**

#### Order code OptiRibbon

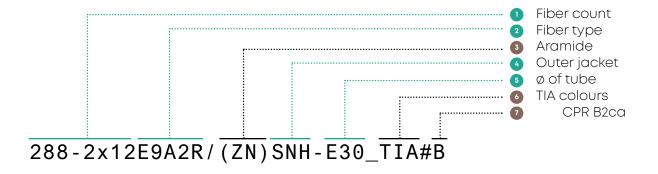

#### Fiber count

12 Base-12, one ribbon per tube

12 - 12 OptiRibbon DJ 12 fibers

48 - 12 OptiRibbon Breakout 48 fibers

72-12 OptiRibbon Breakout 72 fibers

96-12 OptiRibbon Breakout 96 fibers

144-12 OptiRibbon Breakout 144 fibers

24 Base-24, two ribbons per tube

24-2x12 OptiRibbon DJ 24 fibers

96-2x12 OptiRibbon Breakout 96 fibers

144 - 2x12 OptiRibbon Breakout 144 fibers

288 - 2x12 OptiRibbon Breakout 288 fibers

#### Fiber type

**E9A2R** E9/125A2, ITU G.657.A2, **OptiRibbon**, 250 µm



#### **Outer jacket**

HHOuter jacket LSFH, no strain relief (double jacket)


SNH Outer jacket LSFH, with strength member


#### Diameter of tube

**12** 2.0mm E20


E30 3.0mm


#### Top choice items






#### **Order code OptiSlim**

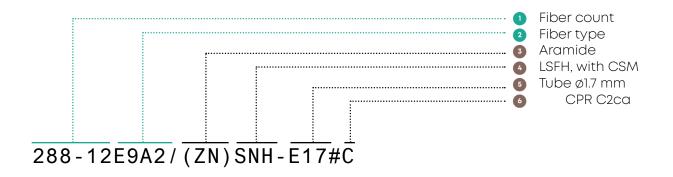


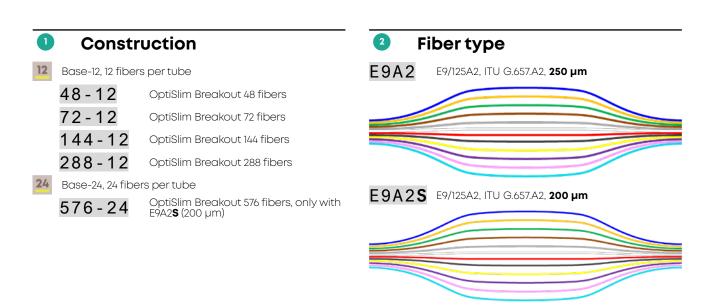

#### **Top choice items**



## Featuring the ODF LISA ribbon

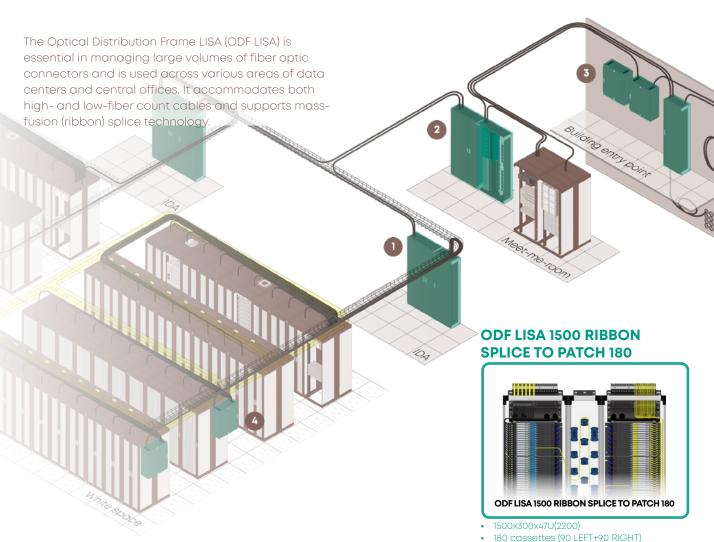

#### **Applications**

Customer demarcation
The ODF LISA ribbon is used to consolidate customer demarcation cabling.

2 Meet-me-room

The ODF LISA ribbon is used in the meet-me-room as a central cross-connect point.

3 Building entry point

The ODF LISA ribbon is used to present outside cables on connectors in the BEP (Building Entry Point).

Zone distribution Create zone distributors with small ODFs

#### ODF LISA 900 RIBBON SPLICE TO PATCH 90



- 900x300x47U(2200)
- 90 cassettes (LEFT or RIGHT)
- from 1080 to 12960 fibers


## ODF LISA 700 RIBBON SPLICE TO PATCH 15

from 2160 to 25920 fibers



- 750x300x17U(900)
- 15 cassettes (LEFT)
- from 180 to 2160 fibers

While the ODF appears unchanged, **numerous enhancements** have been implemented to simplify installation and increase fiber density

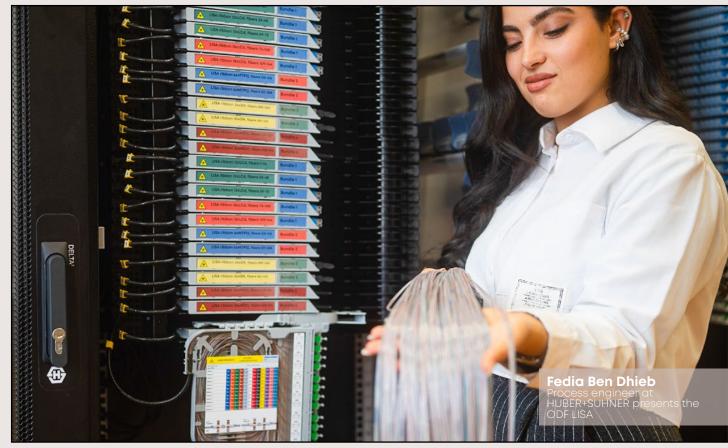







#### Modularity

ODF LISA can be configured in many different ways, from wall cabinets to large frames, cross-connecting thousands of ports



#### **Density**

ODF LISA supports up to 28,000 fibers, making it the perfect choice for meet-me rooms and high capacity distribution zones



#### Handling

With service access from the front only and integrated patch cord management, the ODF LISA minimises installation time and operational disruptions

## **ODF LISA ribbon applications in DCI**


#### **Building A to Building B indoor**


ODF LISA is used to provide fiber optic connections from a cable which connects room to room or building to building in a campus.

Depending on the type of the cable, ODF can be physically placed close to building entry point, or inside internal rooms.

Universal or indoor cables can be used.









#### **Building A to Building B indoor+outdoor**


If buildings are located at a large distance and outdoor cables are used, then a transition from outdoor to indoor is required.













#### Building A to Building C via Building B indoor+outdoor


A cable can be deployed between distanced building, passing an intermediate building. By splicing a specific amount of fibers from the cable and leaving other fibers uninterrupted, three buildings can be interconnected.




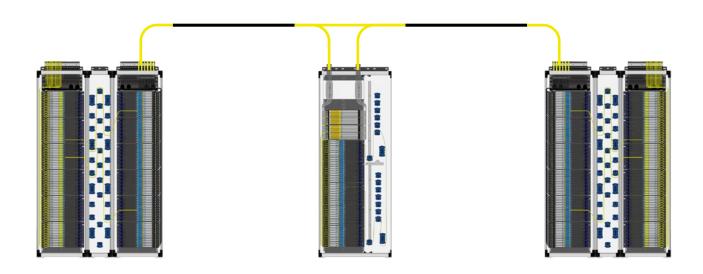

#### Data center interconnect applications

There can be various data center interconnect scenarios. ODF LISA due to its modularity can be configured in a way that all these scenarios can be served.



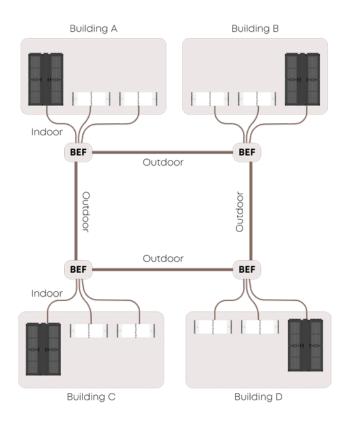


## **ODF LISA ribbon designs**


#### **ODF LISA main components**















## DESIGN 1. ODF LISA 1500 RIBBON SPLICE TO PATCH 180 CASSETTES

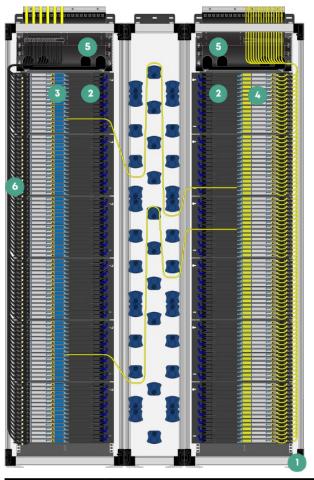

Technical data			
Base rack	NGR 1500 or CDR 1500		
Maximum number of LISA chassis	6x 7U LEFT + 6x 7U RIGHT		
Maximum number of cassettes	180x   90x LEFT + 90x RIGHT		
12f cassette capacity   connectors	2160   SC, E2000, LCd, MDC, SN, MTP-12		
24f cassette capacity   connectors	4320   E2000, LCd, MDC, SN, MTP-12		
36f cassette capacity   connectors	6480   LCd, MDC, SN, MTP-12		
48f cassette capacity   connectors	8640   MDC, SN, MTP-12		
72f cassette capacity   connectors	12960   MDC, SN, MTP-12		
144f cassette capacity   connectors	<b>25920</b>   MTP-12		
Application	<b>Ribbon</b> splicing to patching		
Cable entry option	Top <b>OR</b> bottom		
Patch cord over-length management	Integrated into rack		
Footprint	300 x 1500		
Minimum footprint with service, mm	900 x 1500		
Patch cord types	<b>3.5m</b>   4.0m   4.5m		


## DESIGN 2. ODF LISA 900 RIBBON SPLICE TO PATCH 90 CASSETTES

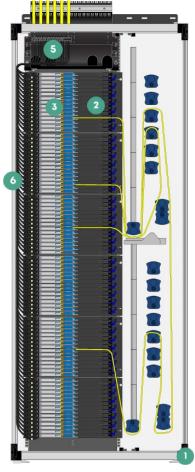

Technical data Base rack NGR 900 or CDR 900 Maximum number of LISA chassis 6x 7U LEFT Maximum number of cassettes 90x LEFT 12f cassette capacity | connectors 1080 | SC, E2000, LCd, MDC, SN, MTP-12 2160 | E2000, LCd, MDC, SN, MTP-12 24f cassette capacity | connectors 3240 | LCd, MDC, SN, MTP-12 36f cassette capacity | connectors 48f cassette capacity | connectors 4320 | MDC, SN, MTP-12 72f cassette capacity | connectors 6480 | MDC, SN, MTP-12 144f cassette capacity | connectors 12960 | MTP-12 Application **Ribbon** splicing to patching Cable entry option Top **OR** bottom Patch cord over-length management Integrated into rack 300 x 900 Minimum footprint with service, mm 900 x 900 Patch cord types **3.5m** and 5.0m


The modularity of the ODF LISA enables a **diverse** array of designs.

## DESIGN 3. ODF LISA 700 RIBBON SPLICE TO PATCH 30 CASSETTES




	,
Technical data	
Base rack	WCB7-17
Maximum number of LISA chassis	2x 7U LEFT
Maximum number of cassettes	30x LEFT
12f cassette capacity   connectors	360   SC, E2000, LCd, MDC, SN, MTP-12
24f cassette capacity   connectors	720   E2000, LCd, MDC, SN, MTP-12
36f cassette capacity   connectors	1080   LCd, MDC, SN, MTP-12
48f cassette capacity   connectors	1440   MDC, SN, MTP-12
72f cassette capacity   connectors	2160   MDC, SN, MTP-12
144f cassette capacity   connectors	<b>4320</b>   MTP-12
Application	Ribbon splicing to patching
Cable entry option	Top <b>OR</b> bottom
Patch cord over-length management	Spare
Footprint	300 x 700
Minimum footprint with service, mm	900 x 700
Patch cord types	3.0m
	1

## **ODF LISA 1500 DOUBLE ACCESS**



Cable distribution rack (CDR) 1500 47U, perforated doors 85109330

CDR15-U47-PFLR-STA-BK ■ on request CDR15-47U-PFLR-STA-GY



Next generation rack (NGR) 1500 46U, perforated doors 85144056

NG1522NS-Q828B1S11R1C1B-1BA00A ■ 85144052

NG1522NS-Q828B1S11R1C1B-1AA00A




R R LISA chassis RIGHT 7U LISA-FIBER-CHASSIS-R-HD-7U-BK ■ 85109666 LISA-FIBER-CHASSIS-R-HD-7U-GY






LISA ribbon splice cassettes LEFT







Example: ODF LISA 1500 SPLICE 180x ribbon cassettes (90 LEFT and 90 RIGHT)

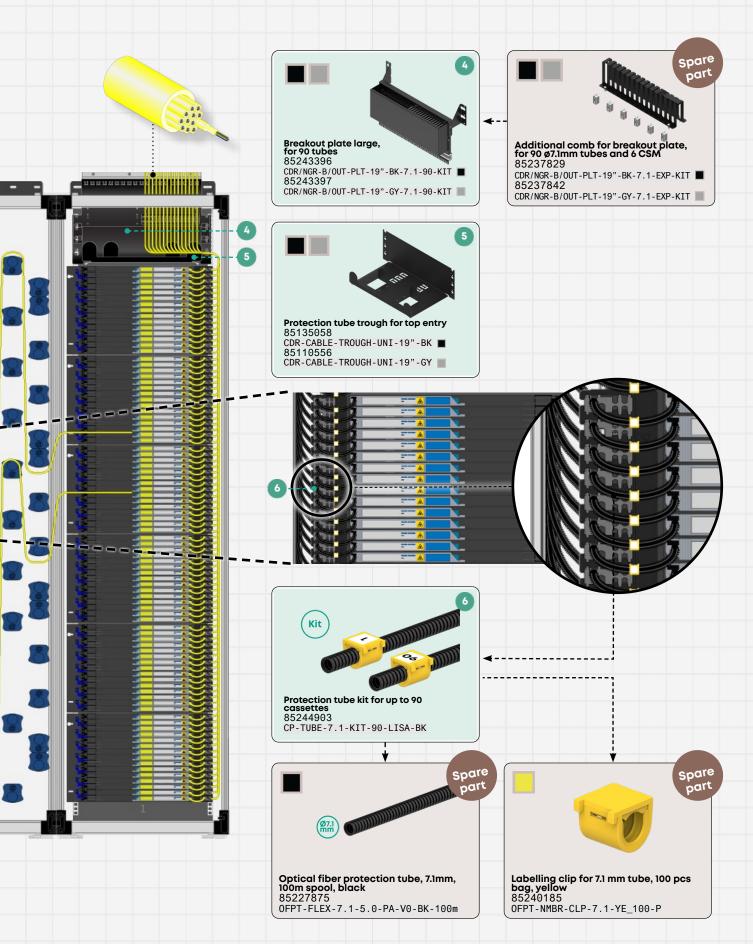


-ISA


LISA

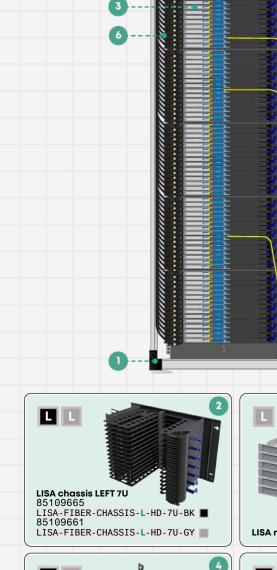


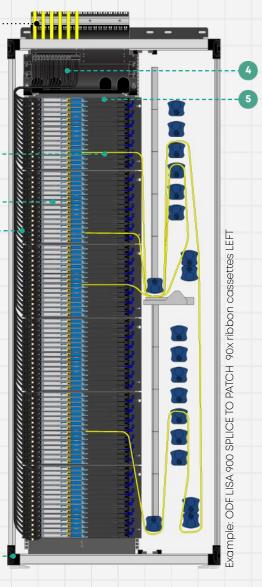










Protection tube trough for top entry 85135058


CDR-CABLE-TROUGH-UNI-19"-BK ■ 85110556

CDR-CABLE-TROUGH-UNI-19"-GY



85029086

CDR09-47U-SDLR-STA-GY






NG0922S-T011B1S11R1C1B-1A0000A


Protection tube kit for up to 90 cassettes 85244903 CP-TUBE-7.1-KIT-90-LISA-BK



## **ODF LISA 700**





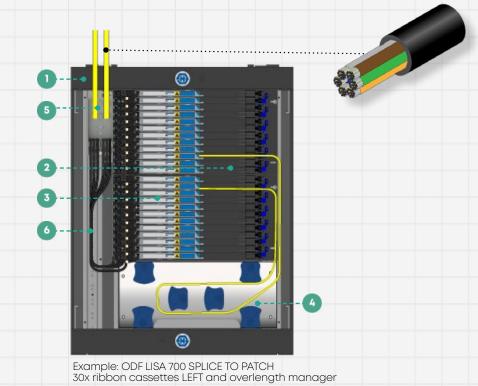












## Featuring a large breakout plate


#### **Breakout plate - elements**




#### **Properties**

- 19 inch breakout plate
- 2 Cover (included)
- One comb for **up to 90** tubes Ø7.1mm
- Additional comb for up to 90 tubes (to be ordered separately)
- 6 6x CSMs (central strength member fixation) mounted
- Equipped with C-rail for clamps
- Equipped with T-slots for cable ties
- 19 inch trough, used in **top entry only** ( to be ordered separately)

#### **Installation example**

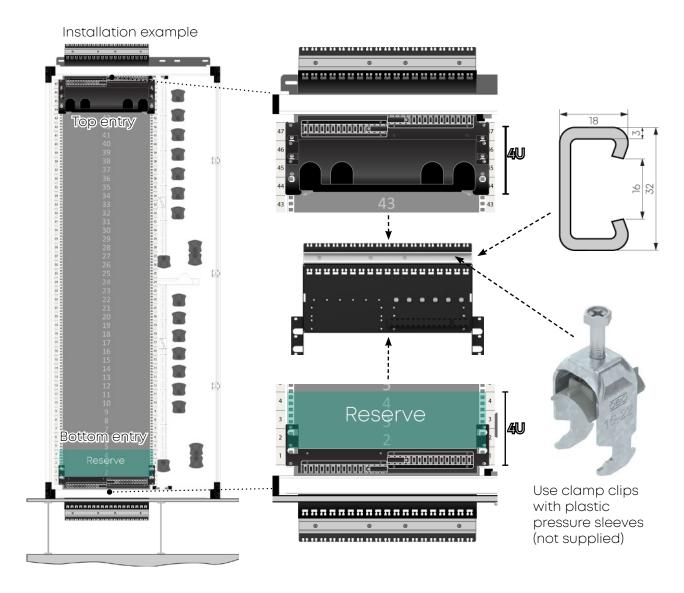


## **Use cases**

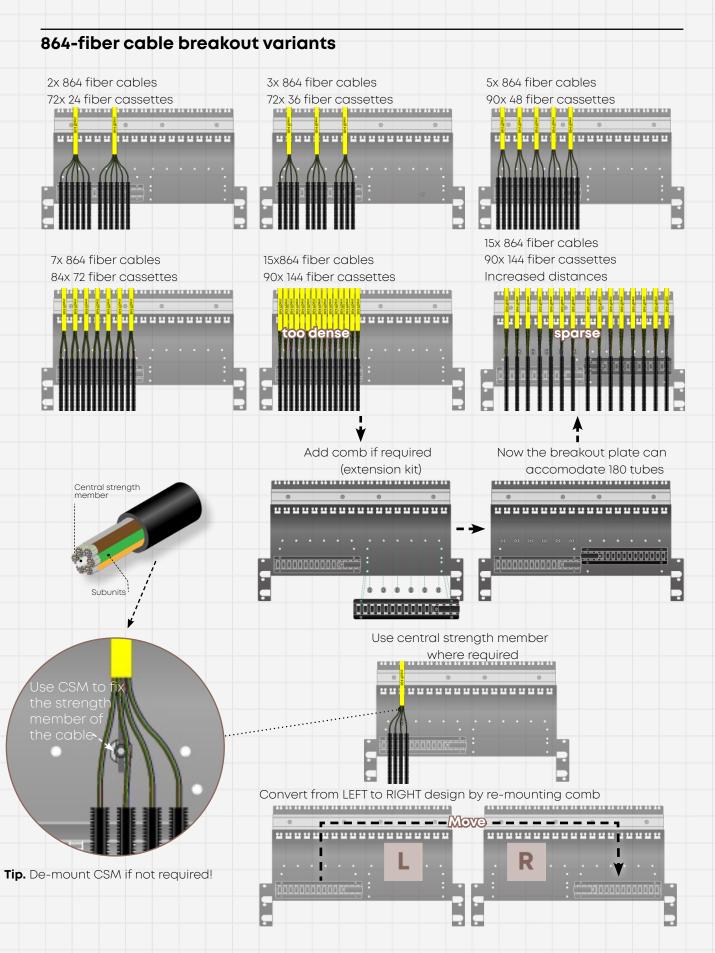


## **Cable terminations**


#### Usage of protection tubes

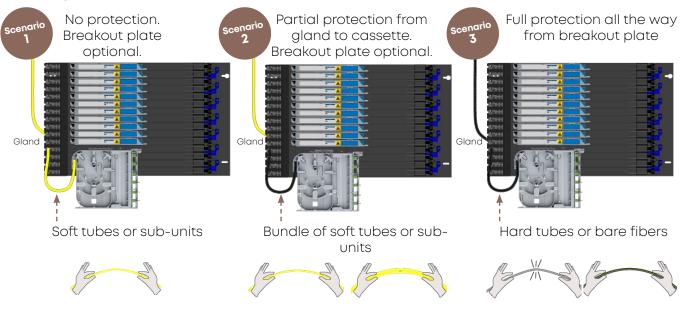



#### Usage of breakout plate and terminations on LISA ribbon cassette

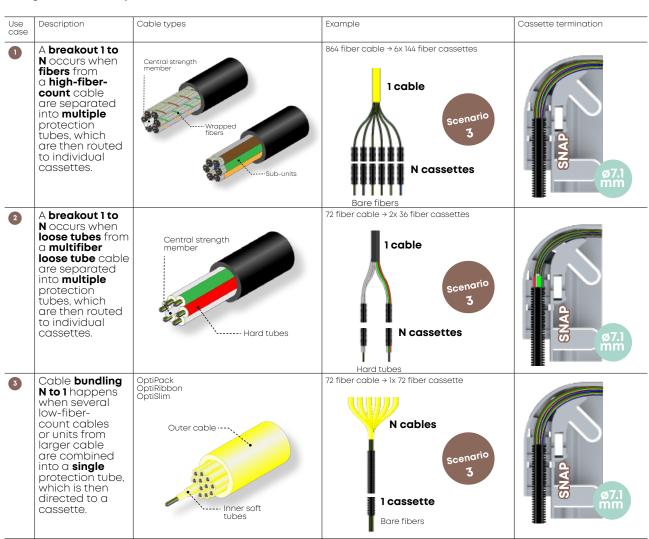

#### Usage of breakout plate and terminations on LISA ribbon cassette

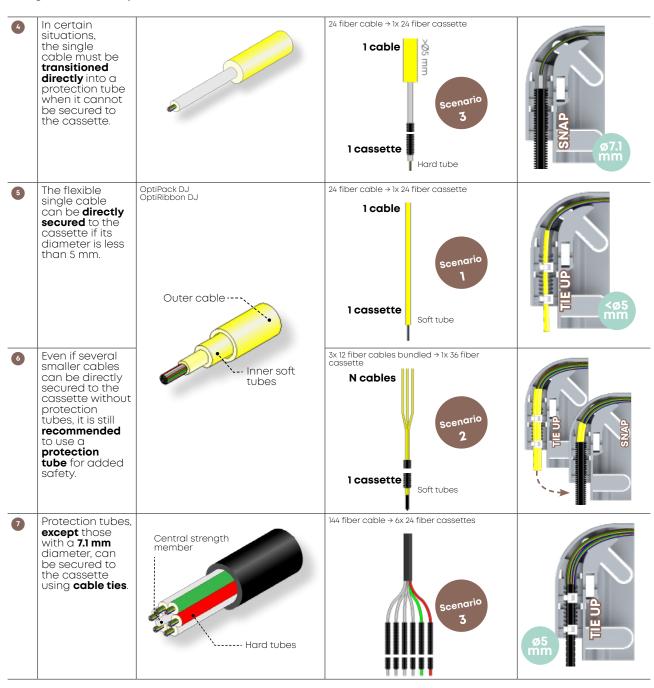








## Featuring the protection tube kit


#### **Protection tube kit - elements**

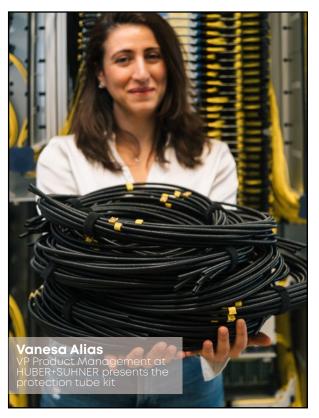

#### **Tube lengths**

Tube set number	Length of tubes in mm
1	830
2	985
3	1140
4	1295
5	1450
6	1605
7	1760
8	1915
9	2070
	1 2 3 4 5 6 7





#### **Properties**


- Fifteen tube sets, each containing 6 tubes, totalling 90 tubes in all, cut to specific lengths
- Marking clips (dark and bright) are mounted on both sides
- Spare tubes, marking clips and velcro straps are included

#### Quantity of kits per ODF LISA required:


Type of ODF	Quantity of kits required		
ODF LISA 1500	2		
ODF LISA 900	1		

Casssette/tube number	Tube set number	Length of tubes in mm
55-60	10	2225
61-66	11	2380
67-72	12	2535
73-78	13	2690
79-84	14	2845
85-90	15	3000

<sup>\* 1</sup>x spare 3m tube and 10x spare marking clips included in




# **Use cases**

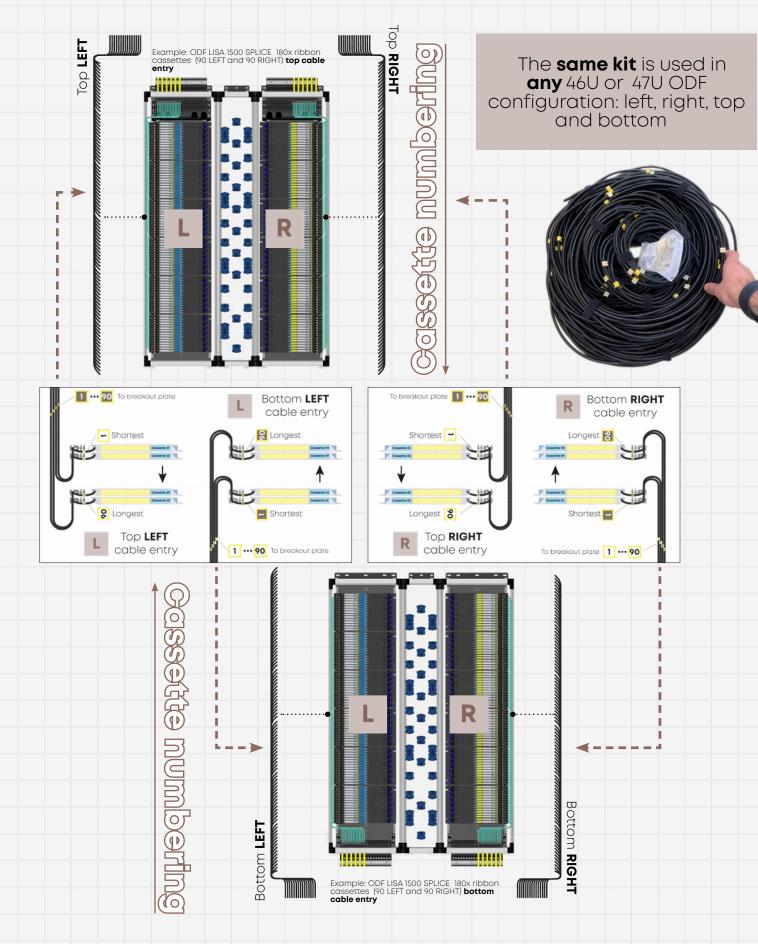


# Featuring the LISA ODU3

The LISA ODU3 is a 19 inch patch panel designed to accommodate LISA ribbon cassettes and can be used in either the ODF LISA or 19 inch cabinets.

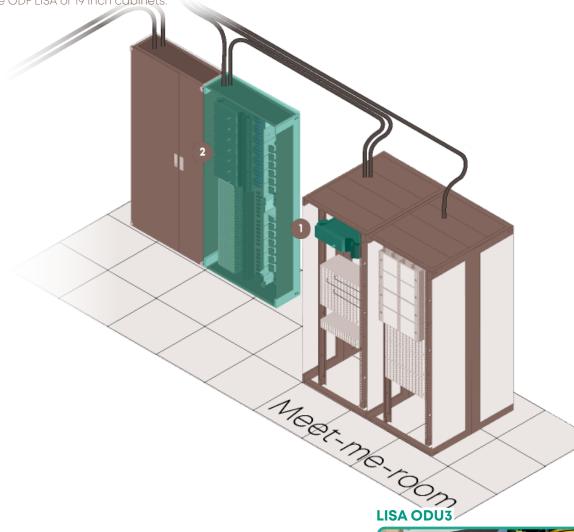

#### **Applications**



LISA ODU3 used in switch or server racks as top-of rack or middle-of-rack panel.

Meet-me-room → ODF LISA with ODU3

LISA ODU3 used as lockable chassis inside the ODF LISA



- Rack height 3U
- Maximum 6 LISA LEFT ribbon cassettes
- From 72 to 864 fibers
- Black or grey

The LISA ODU3 chassis offers compatibility with any 19 inch rack or ODF, **secure access**, patch cord guidance and versatile mounting options.









#### **Density**

Four times more fibers can be deployed in the LISA ODU3 thanks to the new cassette design



#### Splice faster

Faster splicing with the ribbon pigtail



#### Work faster

Larger tube → less tubes required. Simple and similar installation as existing approach.


# LISA ODU3 applications


#### Switch cabling with LISA ODU3


The LISA ODU3 is installed in a 19 inch rack to connect to active equipment.


On day one, a ribbon cable links the ODF LISA to the 19 inch rack with the LISA ODU3. LISA cassettes are used on both ends, in the ODU3 and the ODF.


MTP to LC harness cables or MTP patch cords connect transceivers to the LISA cassettes.

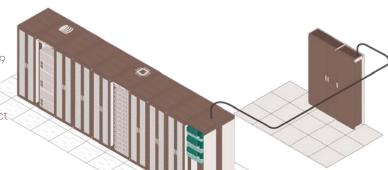


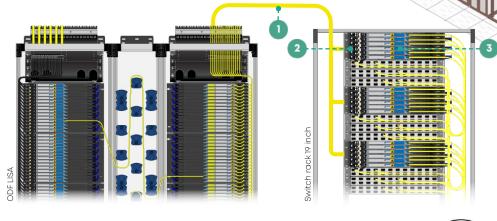





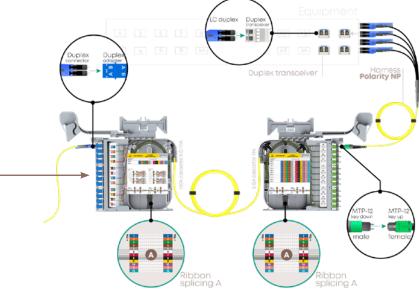








#### **ODF LISA with ODU3**

The LISA ODU3 is used to create another type of ODF LISA. It features a lockable door for added security of critical connections.

In meet-me-rooms, it presents cables from various service providers in lockable chassis with restricted access.

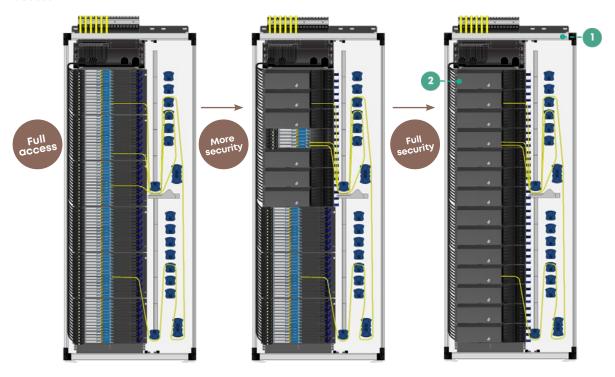

Technical details ODF LISA with ODU3				
rechilicul detalis ODF LISA With ODUS				
Base rack	NGR 900 or CDR 900			
Maximum number of LISA ODU3 chassis	<b>14x</b> 3U LEFT			
Maximum number of cassettes	84x LEFT			
12f cassette capacity   connectors	1008   SC, E2000, LCd, MDC, SN, MTP-12			
24f cassette capacity   connectors	2016   E2000, LCd, MDC, SN, MTP-12			
36f cassette capacity   connectors	3024   LCd, MDC, SN, MTP-12			
48f cassette capacity   connectors	4032   MDC, SN, MTP-12			
72f cassette capacity   connectors	6048   MDC, SN, MTP-12			
144f cassette capacity   connectors	12096   MTP-12			
Application	<b>Ribbon</b> splicing to patching			
Cable entry option	Top <b>OR</b> bottom			
Patch cord over-length management	Integrated into rack			
Footprint	300 x 900			
Minimum footprint with service, mm	900 x 900			
Patch cord types	3.5 m and 5.0 m			






LISA


# **Overview**

#### LISA ODU3 - elements




#### **Properties**

- Door with lock
- 4 Horizontal mandrel for patch cord management
- Wertical detachable mandrels for patch cord management
- Removable cable fixation plate and cover
- 6 slots for LISA cassettes LEFT
- Reversible left and right mounting bracket for ODF or 19 inch cabinet installation
- Fixation glands for protection tube Ø7.1 mm and Ø5 mm and set of 6x protection tubes






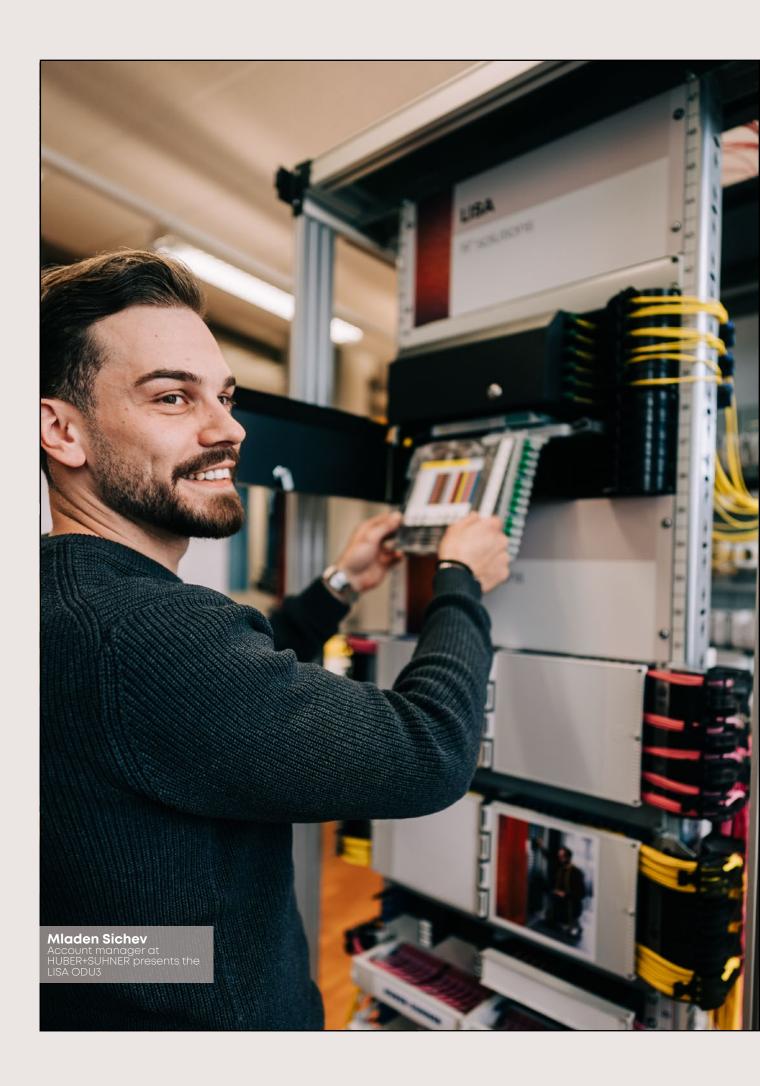


ODF

# Featuring the LISA ribbon cassette


#### LISA ribbon cassette overview

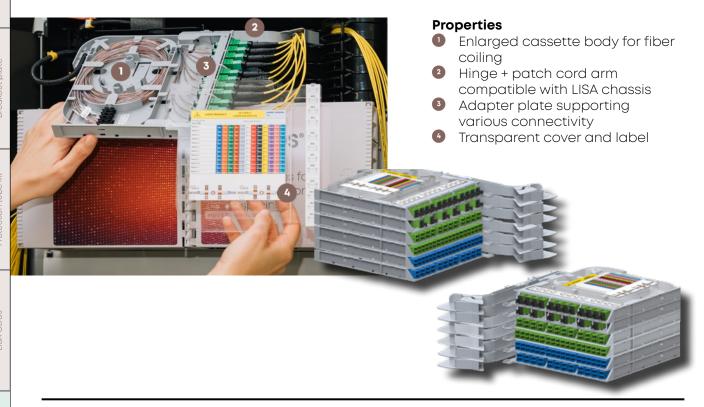

#### LISA ribbon cassette in LISA chassis and LISA ODU3

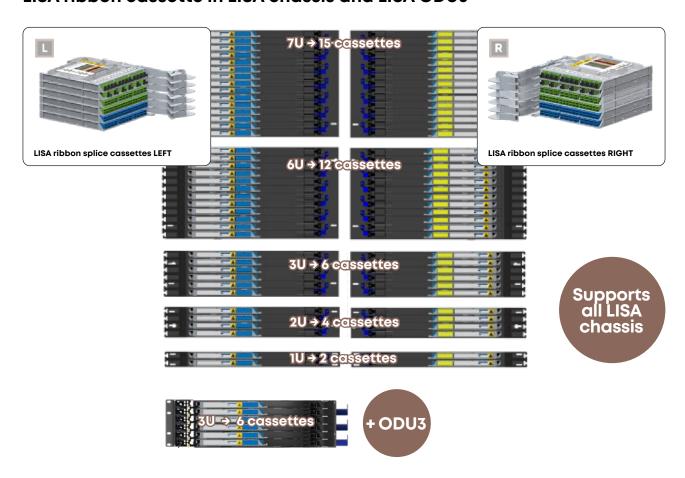


#### LISA standard and ribbon cassette comparison

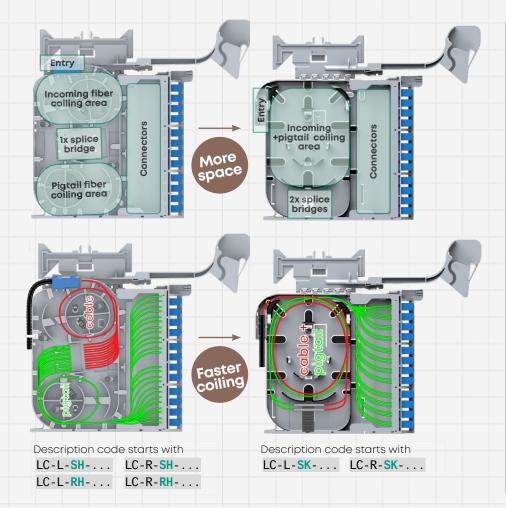


#### **Updates**

- A larger and combined coiling area, up to 144 fibers
- Modified cassette entry + support 7.1mm protection tube. Standard cassette supports 5.0mm tube.
- Up to 2x splice bridges, to store up to 12 ribbon splice sleeves
- New front plates to support VSFF
- OptiRibbon pigtails instead of flat ribbons

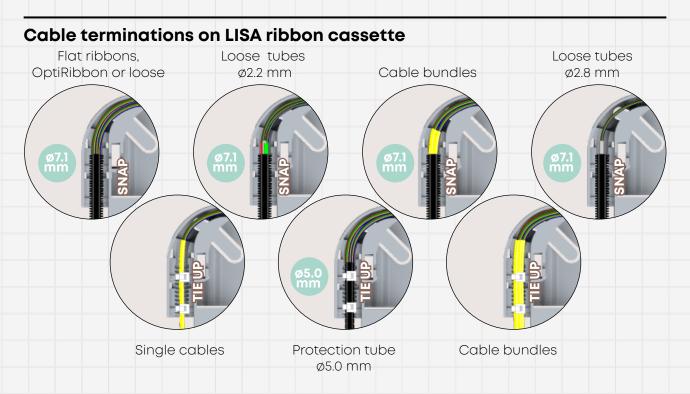


# **Cassette types**

#### LISA ribbon cassette types

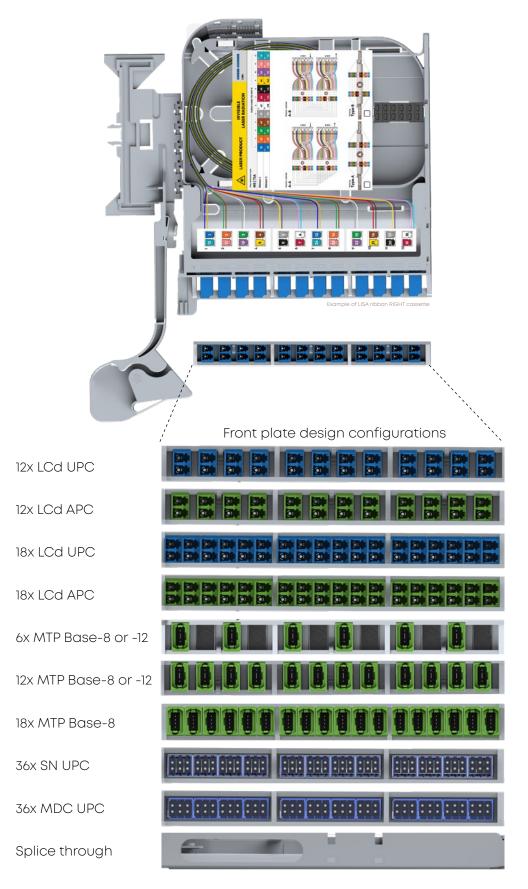

# Featuring the Helper tool

#### **Helper tool**

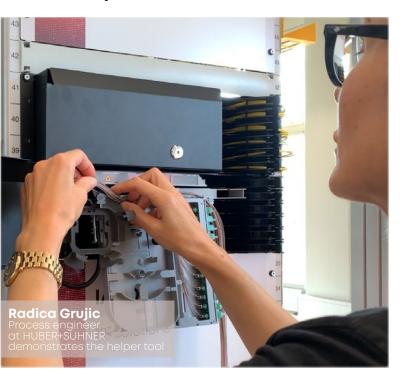


#### **Properties**

- Optional tool which simplifies fiber coiling
- Attachable/detachable
- · Coil size matches cassette body
- · Kit consists of two similar pieces



#### How it works?













# Splicing methods and polarity

#### **Splicing method NS+TIA**










#### **Duplex permanent link A-A**


- → **side A: type A** ribbon splicing
- → side B: type A ribbon splicing






#### **Duplex permanent link A-B**

- → side A: type A ribbon splicing
- → side B: type B ribbon splicing




Data center


#### **Splicing method TIA**




#### Parallel permanent link B

→ side A: type A ribbon splicing→ side B: type B ribbon splicing





# Splicing method AS+TIA Side A Splice cassette AS+TIA Splice cassette AS+TIA Splice cassette AS+TIA Splice cassette AS+TIA Duplex permanent link A-A Side A: type A ribbon splicing Splice cassette AS+TIA Backbone

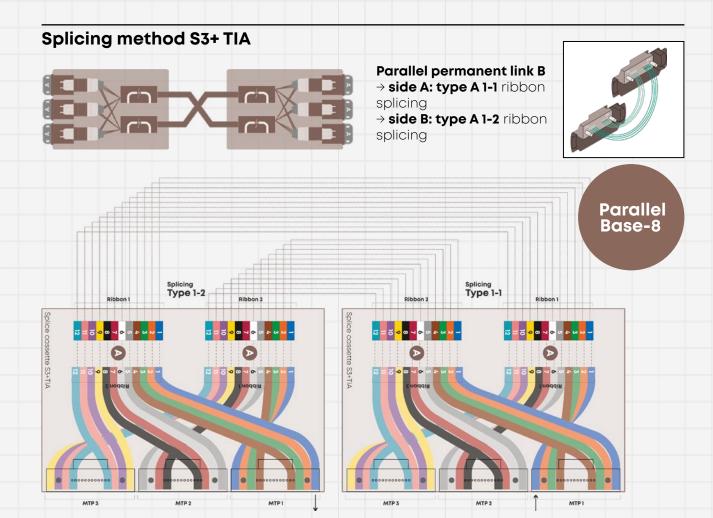

ISA

# **Ordering information**

LISA ribbon splice cassette 12x LCd, AS+TIA











LISA ribbon splice cassette
12x LCd, NS+TIA

Data center + Central office









LISA ribbon splice cassette 18x LCd, NS+TIA












LISA ribbon splice cassette 36x SN, NS+TIA

Data center LISA ribbon splice cassette LEFT, 72x fiber, 36x SN UPC, NS+TIA, singlemode 85247436 LC-L-SK-12-SNU6-00-0000-A2-NS-R1S0




LISA ribbon splice cassette 36x MDC, NS+TIA

Data center LISA ribbon splice cassette LEFT,
72x fiber, 36x MDC UPC, NS+TIA, singlemode
85247434
LC-L-SK-12-MDU6-00-0000-A2-NS-R1S0



LISA ribbon splice cassette 6x MTP Base-12 male, TIA

Parallel Base-8 or -12 LISA ribbon splice cassette LEFT, 72x fiber, 6x MTP-12, TIA, singlemode 85241952 LC-L-SK-06-MTAM-00-0000-A2-04-R1B0



LISA ribbon splice cassette 12x MTP Base-12 male, TIA

Parallel Base-8 or -12






LISA ribbon splice cassette 18x MTP Base-8 male, S3+TIA








# LISA ribbon splice through cassettes

#### LISA ribbon splice through cassette features

The LISA ribbon splice through cassette can be installed in any LISA LEFT or RIGHT chassis to create a secure connection between incoming and outgoing cables. Once the cables are spliced, they cannot be disconnected, enhancing security and improving the loss budget. Additionally, each cassette can have up to two different splice holders (not just ribbon) to accommodate various types of splice protectors.




Stacking two splice holders enables high splice density.








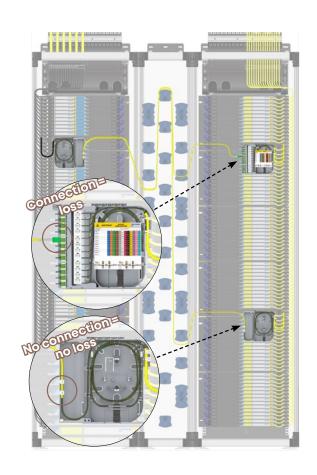

#### LISA splice through cassette splicing scheme and cable options

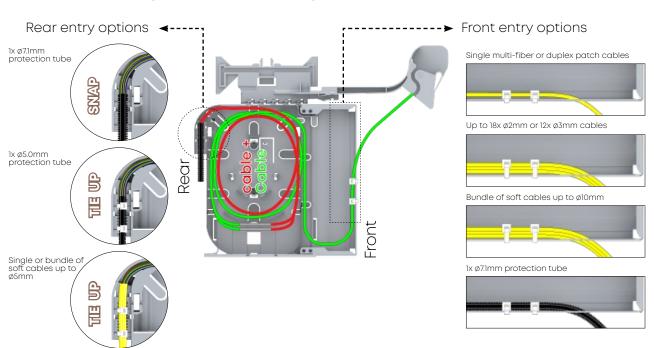

#### **Ordering information**





#### **Versatile splicing**

Adding different splice holders and protectors customises a cassette for various splicing techniques.

Technical detail	5
Type of fiber	Any type of fiber: loose single fibers, OptiRibbons (flexible ribbons) or flat ribbons
Number of fibers	Up to 144 fibers (loose fibers or 12 ribbons)
Front	Various cable entry options: Single multi-fiber or duplex patch cables Up to 36x Ø1.6mm, 18x Ø2mm or 12x Ø3mm soft cables Bundle of soft cables up to Ø10mm 1x Ø7.1mm protection tube
Rear	Various cable entry options (same on all LISA ribbon cassettes)  1x Ø7.1mm protection tube  1x Ø5.0mm legacy protection tube  Single or bundle of soft cables < Ø5.0mm
Colour code	TIA, DIN or any other
Splice holders	Includes 1x splice holder for 6x ribbon splice protectors Other splice holders can be ordered additionally, as per table below
Splice protectors	Includes 6x heatshrink ribbon splice protectors Other splice protectors can be ordered additionally, as per table below


#### Splice holders and protectors overview


Holder	Illustration	Stacking	Design	Protector (sleeve)	LISA cassette capacity in fibers
Splice holder 24-way sandwich 84103969 SPL-COMP-ACS-SW-24-WAY		Yes	1 row   24 single sleeves	Splice protector, single, sandwich, 30 mm, 150 pcs 23218558 SPL-PR-SW-30-150P	48
Splice holder 36-way sandwich 84163960 SPL-COMP-FTII-SW-36-WAY		No	2 row   18 single sleeves		36
Splice holder 24-way heatshrink Ø1.5 mm 84123618 SPL-COMP-ACS-HS1.5-24-WAY		Yes	2 rows   12 single sleeves per row	Splice protector, single, heatshrink Ø1.5 mm, 40 mm, 12 pcs 84004470 SPL-PR-HS-1.5x40mm-12P	48
© Splice holder 36-way heatshrink Ø1.5 mm 84142487 SPL-COMP-FTII-HS1.5-36-WAY		No	3 rows   12 single sleeves per row		36
			1 row   12 ribbon sleeves	Splice protector, ribbon, slim, heatshrink 1.5x40 mm, 50 pcs 85258823 SPL-PR-RB-1.5x40mm-50P	144
© Splice holder 12-way heatshrink Ø2.4 mm 84127301 SPL-COMB-ACS-HS2.4-12-WAY		Yes	1 row   12 single sleeves	Splice protector, heatshrink Ø2.4 mm, 45 mm, 12 pcs 84064457 SPL-PR-HS-2.4x45mm-12P  Splice protector, heatshrink Ø2.4 mm, 45 mm, 100 pcs 840965214  SPL-PR-HS-2.4x45mm-100P  Splice protector, heatshrink Ø2.4 mm, 60 mm, 100 pcs 840965215  SPL-PR-HS-2.4x60mm-100P	24
Splice holder 6-way ribbon heatshrink 3.75x5.75 mm 85069503 SPL-COMP-FTII-RB-06-WAY-BK		Yes	1 row   6 ribbon sleeves	Splice protector, heatshrink ribbon 3.75x4.75, 40 mm, 50 pcs 85134949 SPL-PR-RB-3.75x4.75x40mm-50P	144

ISA

### Order code overview

#### Order code LISA ribbon splicing cassette

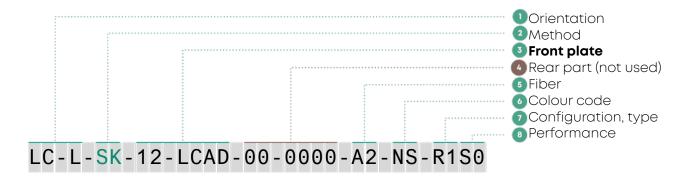




2 Method

SK Splicing cassette for mass fusion splicing - "ribbon ready", with hinge included


Front plate



#### 5 Fiber type

**A 2** E9/125A2, ITU G.657.A2, OptiRibbon

All LISA ribbon splice cassettes equiped with flexible ribbon fiber (OptiRibbon), which is suitable for mass and single fusion splicing



\* Ribbon colour code - TIA-598-C

#### Colour code front plate

NS+TIA method for duplex applications

04
TIA colour code for MPO/MTP applications

S3 Conversion from 3x MTP Base-8 to 2x MTP Base-12

AS

TIA colour code for legacy duplex and simplex applications

#### Configuration

R0

**R1** 

R2

R3

B0

1x ribbon splice protection holder (≤ 72 fibers), protectors **excluded**1x ribbon splice protection holder (≤ 72 fibers), 3.75x4.75x40 protectors **included**2x ribbon splice protection holders (≤ 144 fibers), protectors **excluded**2x ribbon splice protection holders (≤ 144 fibers), 3.75x4.75x40 protectors **included** 

H 0

1x single splice protection holder, type
Ø1.5x40mm (≤ 36 fibers), protectors **excluded**1x single splice protection holder, type

H1 | IX single splice protection holder, type | Ø1.5x40mm (≤ 36 fibers), protectors included | 2x single splice protection holder, type | Ø1.5x40mm (≤ 48fibers), protectors excluded | 2x single splice protection holder, type |

H3 2x single splice protection holder, type Ø1.5x40mm (≤ 48 fibers), protectors **included** 

#### Performance

\$0 Class S - Singlemode standard (LC, SC, MDC, SN)

Class B - Singlemode elite (MTP, E2000)

Optical performance LISA ribbon cassette and IANOS ribbon module $$				
Type of connector	Insertion loss IEC 61300-3-4 method B	Insertion loss, mean values	Return loss UPC	Return loss APC
LC, SC, E2000 singlemode	≤ 0.30 dB	0.12 dB	≥ 50 dB	≥ 65 dB
MDC, SN singlemode	≤ 0.30 dB	0.20 dB	≥ 50 dB	≥ 65 dB
MTP singlemode	≤ 0.35 dB	0.10 dB	not available	≥ 65 dB


#### Customise

Create your own LISA ribbon cassette design

Adapter type Front plate configurat		Front plate configuration	Design and port numbering	Maximum fiber quantity per cassette	Number of ribbons	Suitable connector	
LC Standard 12-LCxD		12-LCxD	12 13 13 13 13 13 13 13 13 13 13 13 13 13	24	2	Any LC - duplex or simplex	
	HD	18-LC <b>x</b> D	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	36	3	High-density only (e.g. LC-XD	
SC		12-SC <b>x</b> S	1 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	12	1	SC simplex	
E2000	Simplex	12-E2 <b>x</b> S	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	12	1	E2000 simplex	
	Duplex	12-E2 <b>x</b> D	2 2 2 2 3 5 5 5 7 5 5 7 5 7 5 7 5 7 5 7 5 7 5 7	24	2	E2000 duplex o simplex	
MPO/MTP 12-fiber		06-MTAy		72	6	MTP/MPO 8- or 12- fiber compatible -	
		12-MTAy	12 10 10 10 10 10 10 10 10 10 10 10 10 10	144	12	female or male	
MPO/M	TP 8-fiber	18-M8Ay	18 17 18 18 18 18 18 18 18 18 18 18 18 18 18	144	12		
MDC	6 channel	08-MDx6	X 2 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	48	4	MDC senior	
	6 channel with blank	12-MD <b>x</b> Q	2 23 23 23 23 23 23 23 23 23 23 23 23 23	48	4		
	6 channel	12-MDx6	88888888888888888888888888888888888888	72	6		
SN	6 channel	08-SNx6	XXXXX000000000000000000000000000000000	48	4	SN senior	
	6 channel with blank	12-SN <b>x</b> Q	2 22 2 3 3 3 3 7 3 3 7 3 7 3 7 3 7 3 7 3	48	4		
	6 channel	12-SNx6	######################################	72	6		
Splice-through 01-Xi00		01-Xi00		144	12	-	

Note x: U → UPC (blue adapter) | A → APC (green adapter) y: F → female inside (green adapter) | M → male inside (green adapter)

# Featuring the IANOS ribbon

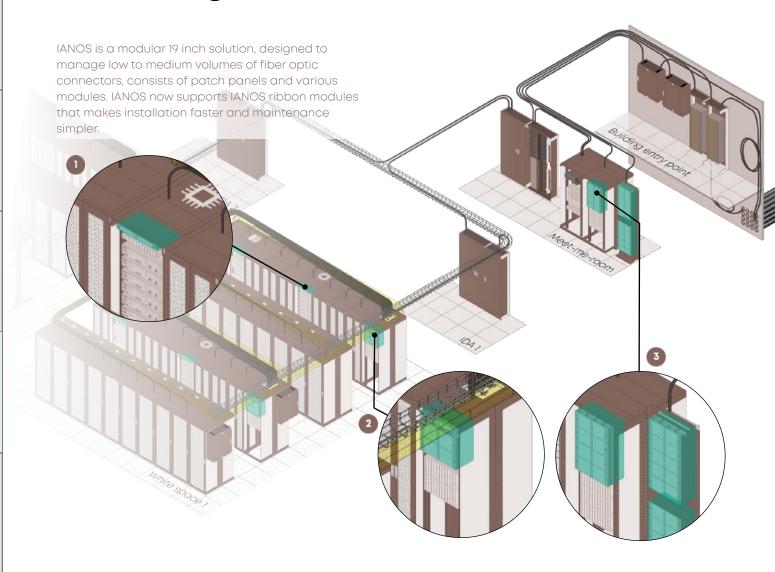

#### Applications

- White space → top of rack
  The IANOS ribbon as top of rack
- White space → end of row
  White space → demarcation
  The IANOS ribbon as end of
  row or middle of row solution
- Meet-me-room → distribution
  IANOS ODF ribbon can be used in meet-me-room to present outside cables on


connectors

#### **IANOS** chassis




- 1U or 4U 19 inch patch panel
- Lite (fixed) and standard (sliding) designs
- From 4 to 24 modules

#### IANOS ribbon modules



- Up to 144 fibers per module
- Various adapter designs

IANOS® enables the **highest** possible **packing** density without compromising handling, allowing data centers to maximize revenue-generating space by minimizing the footprint of passive equipment.

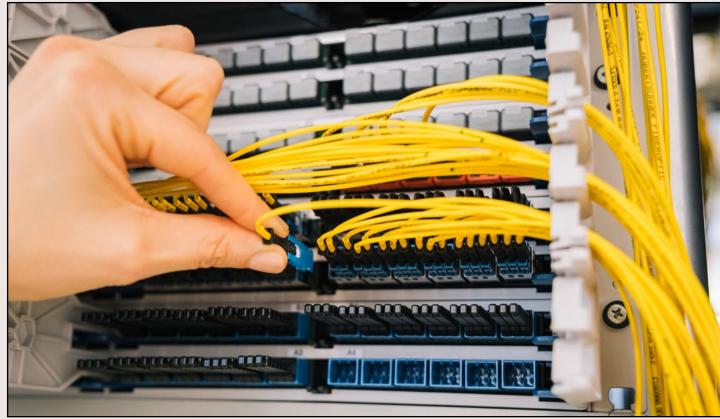







#### **Density**

Three times as many fibers can be deployed in a 19 inch rack using the IANOS system with ribbon fibers



#### Splice faster

Faster splicing with the ribbon pigtail



#### Work faster


Larger tube → less tubes required. Simple and similar installation as existing approach.


# **IANOS** ribbon applications

#### IANOS ribbon in top-of-rack, end-of-row or as demarcation point


Various IANOS chassis, combined with IANOS ribbon modules, support top- or middle-of-rack setups to connect leaf or access switches within customer cages. Larger IANOS chassis with modules are used in switch racks for end-of-row designs.


The IANOS can also connect to backbone fiber, serving as a demarcation point between the data center operator and the customer.

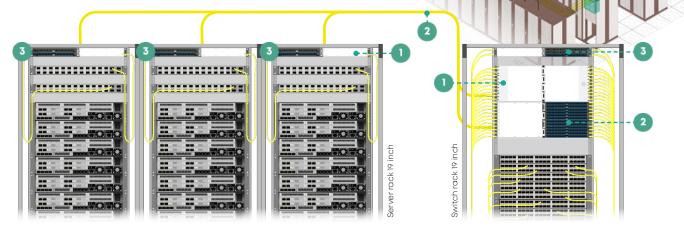


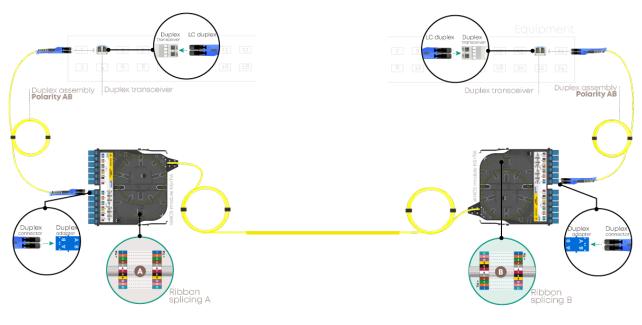








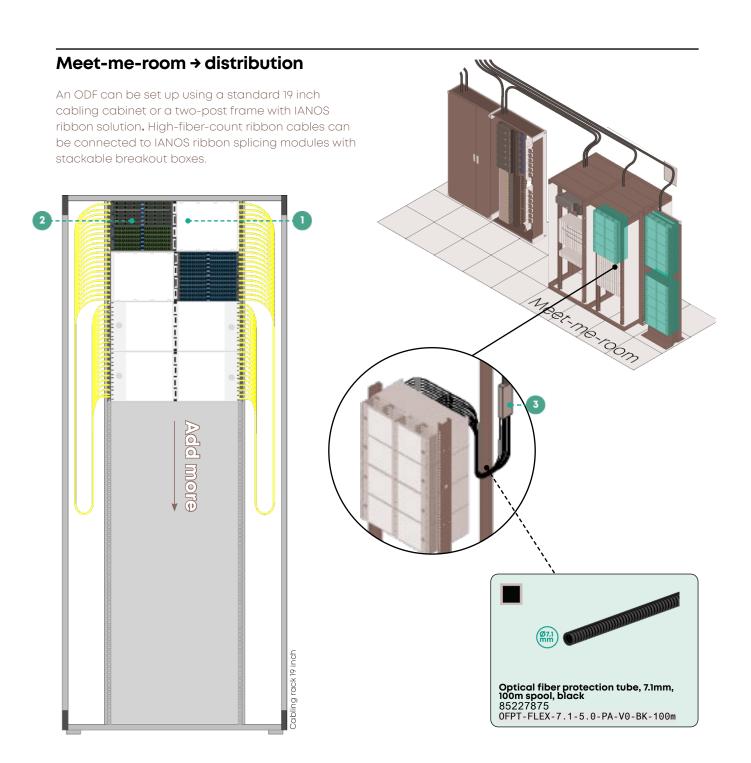








# IANOS ribbon module overview

#### **IANOS** ribbon module - elements

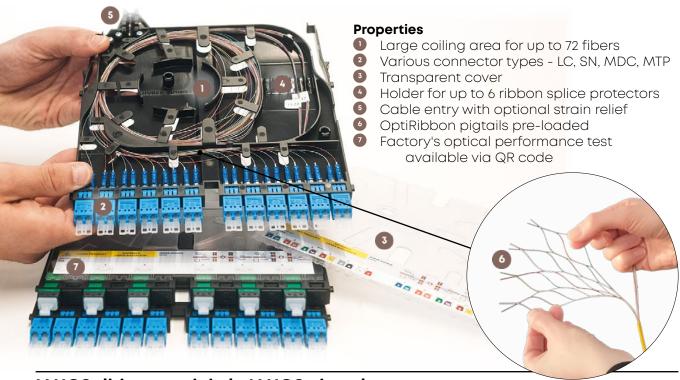

#### IANOS ribbon module in IANOS chassis



- · IANOS 1U lite, up to 4 modules
- · From 24 to 288 fibers



- IANOS 4U lite, up to 16 modules
- · From 24 to 1152 fibers





- · IANOS 1U standard, up to 6 modules
- · From 24 to 432 fibers




Supports all IANOS panels

- · IANOS 4U standard, up to 24 modules
- From 24 to 1728 fibers






Top of rack, demarcation, End- or middle-of-row



#### IANOS standard and ribbon module comparison

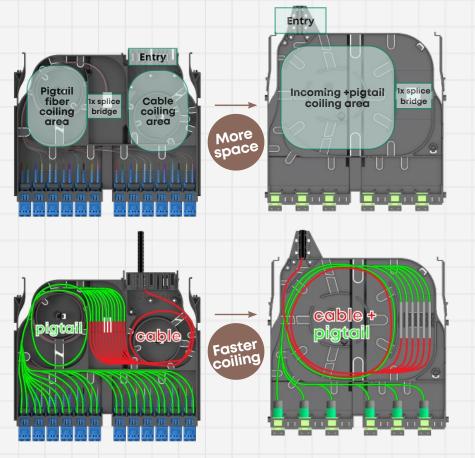


#### **Updates**

- Combined larger coiling area, for up to 72 fibers
- Modified module entry to support 7.1mm protection tube.
- Splice bridge, to store up to 6 ribbon splice sleeves (72 fibers)
  - Transparent cover

Description code starts with ISD-...

Description code starts with **IKD-...** 

#### **Cable terminations**

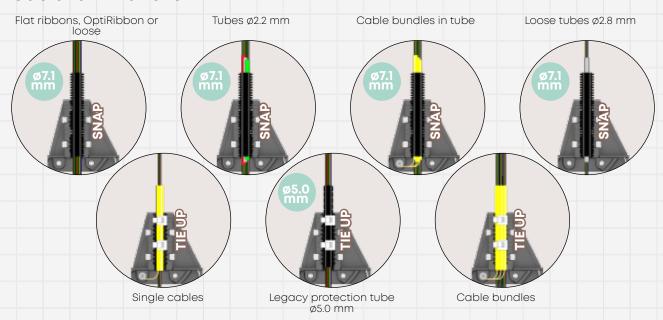


# **Module types**


#### **IANOS** module types

12x LCd UPC

12x LCd APC


36x SN UPC



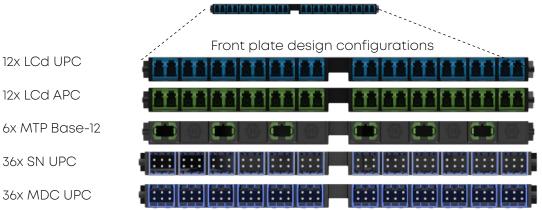

#### Splicing 3x 1728-fiber ribbon cable in 19 inch rack 000 Maximum number of fibers in **ODFIANOS** Fiber quantity per module 72 fiber **→ 72** modules 24 fiber **→ 216** modules Maximum fiber quantity per 1U 144 432 0 0 0 0 0 0 0 Maximum fiber quantity per 4U 576 1728 0 0 Maximum fiber quantity per 42U cabinet 17280 5760 0 0 LC duplex 0 0 0 0 MDC or SN 0 0 0 0 MTP Base-12 **x**3 0 0 0 0 0 0 ess 0 0 Maximum number of cables in 0 ODF IANOS and utilized rack height 0 0 0 0 0 0 0 0 432 fiber cable 13 | 39U 40 | 40U 0 0 0 0 576 fiber cable 10 | 40U 30 | 40U 864 fiber cable 6 | 36U 20 | 40U 1728 fiber cable 3 | 36U 10 | 40U 3456 fiber cable 1 | 24U 5 | 40U \* 3 times less modules used


# IANOS ribbon splice module 24 fibers, 12x LCD, NS+TIA

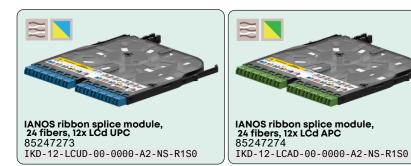

IANOS ribbon splice module 72 fibers, 36x VSFF, NS+TIA



IANOS ribbon splice module 72 fibers, 6x MTP Base-12



# IANOS chassis and accessories

#### **IANOS** chassis










#### IANOS cable managers













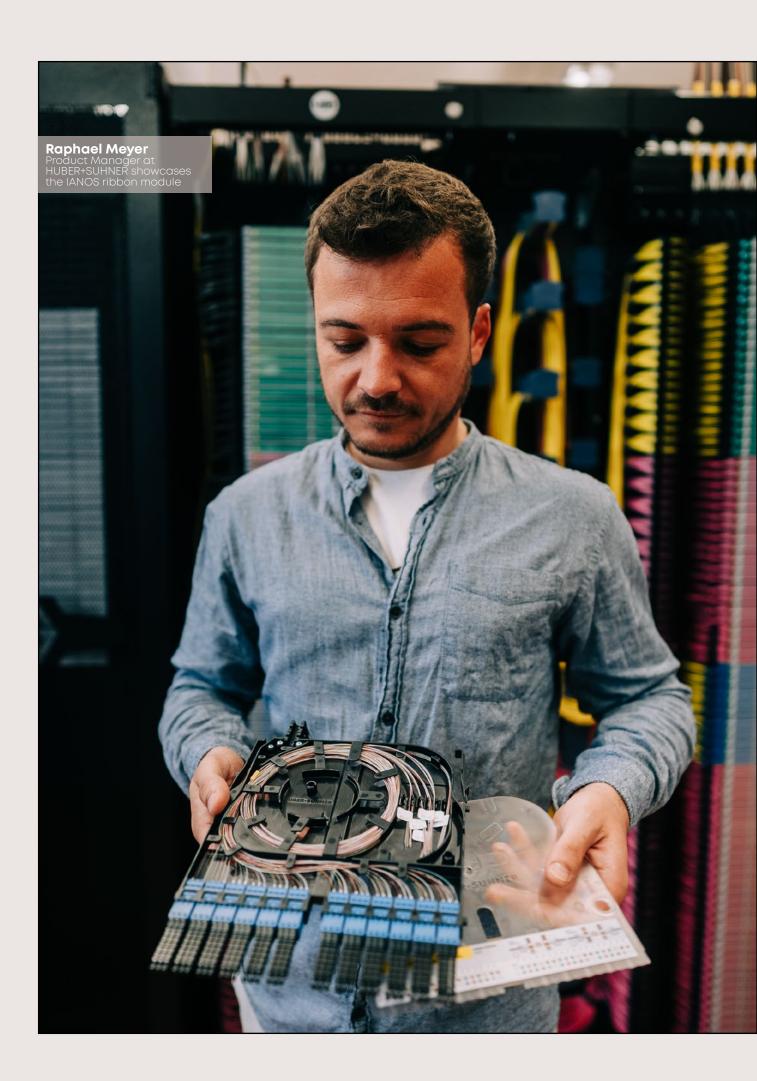

# Featuring the RSB

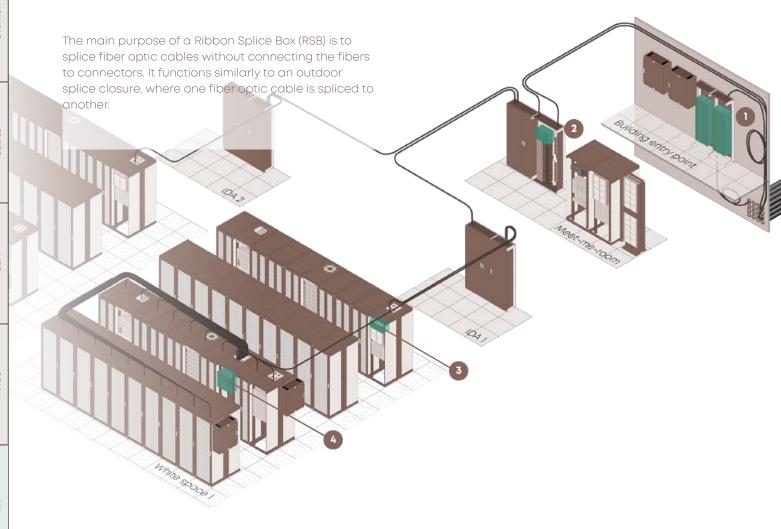

#### **Applications**

Building entry point
RSB connects outdoor and indoor cables, installable

cabinets.

Fiber storage

RSB accesses and splices some fibers while storing the rest.

in 300mm racks or 19 inch

Splice point

RSB saves time by enabling ribbon splicing.

Fixed cross-connect

RSB enables centralized fiber optic cross-connects.

#### Ribbon splice box (RSB)



- Rack height 2U
- 6 drawers 288 fibers max each
- Up to 1,728 fibers

Mass-fusion splicing in **RSB** allows up to 1,728 fibers in a 2U space, with each drawer handling up to 288 fibers. An ODF can house 20 RSBs, enabling over 34,000 fibers.









#### Consolidation

Centralizes up to 1,728 fibers in just 2U of rack space



#### **Efficiency**

Supports mass and single fusion splicing for efficient installation




#### Versatility


Ideal for any outdoor-toindoor fiber transitions and for any rack type.


# **RSB** applications


#### **RSB** in building entry point

RSB is used to connect outdoor cables to indoor cables. It can be installed in either 300mm deep racks with front access or 19 inch cabinets. Various ODF designs can be created to accommodate different combinations of incoming and outgoing cables.

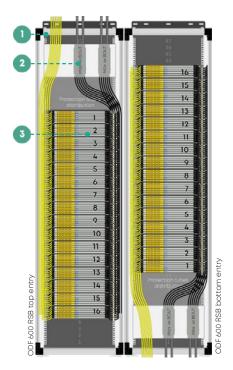

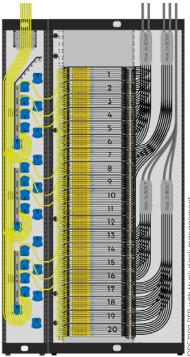





Technical data				
Base rack	NGR 600 or CDR	600		
Number of fibers	144 per drawer   13824			
	288 per drawer	27648		
Size (DxWxH), mm	300 x 600 x 2200			

Technical data				
Base rack	NGR 1200 or CDR	1200		
Number of fibers	144 per drawer	17280		
	288 per drawer	34560		
Size (DxWxH), mm	300 x 1200 x 2200			

Technical data				
Base rack	Wall cabinet 17U			
Number of fibers	144 per drawer <b>5184</b>			
	288 per drawer	10368		
Size (DxWxH), mm	300 x 700 x 900			









#### Fiber storage in RSB in a mid-span application

RSB is used in mid-span applications. A portion of the fibers from the cable connecting racks can be accessed, grouped into bundles, fixed via a breakout box, and spliced to cassettes. The remaining fibers continue uninterrupted, coiled, and stored inside the RSB.

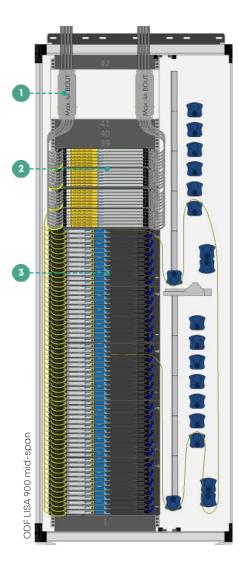

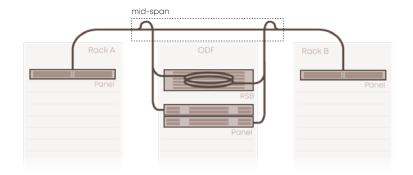








# **RSB** applications

#### RSB as splice point

RSB serves as an enlarged splice point. During large-scale installations, ribbon splicing within the RSB can save significant cassetizing time compared to splicing each cable in individual cassettes. For optimal efficiency, combine the RSB with one-side terminated modules, harnesses, or assemblies.

	Solution 1	Solution 2	Solution 3	
Fiber quantity	1152			
Quantity and type of pigtail	96x OptiPack module IANOS LC, 12-fiber	32x OptiPack module IANOS SN, 36-fiber	96x MTP jumper + IANOS patch module, 12-fiber	
Number of IANOS chassis	nber of IANOS 2x 4U chassis 3x 1U chassis		2x 1U chassis	
RSB configuration	<ul> <li>192 fibers per drawer → 6 drawn</li> <li>288 fibers per drawer → 4 drawn</li> </ul>			
0	Zoo inscripter diawer 74 die	WOIS		

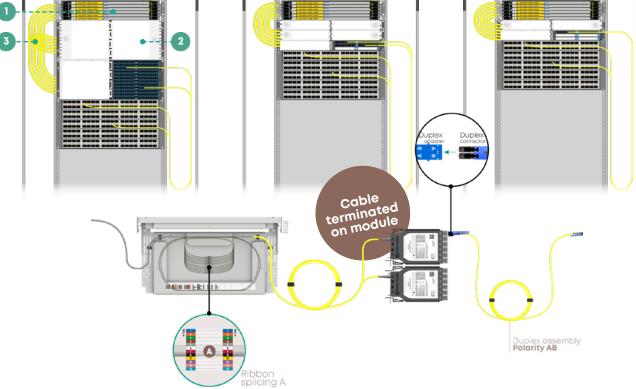








#### **Fixed cross-connect with RSB**

RSB is used to facilitate fixed fiber optic crossconnects. Dedicate a rack to serve as a central node and route all pre-terminated cables to this node for centralised splicing.

With support for both single and mass fusion splicing, and the capacity to handle a large number of fibers, various configurations can be created.









## **RSB** overview

#### **RSB** elements



#### **Properties**

- · 6 drawers, each drawer can contain:
  - ≤ 288 fibers (24 ribbon protectors for mass splicing)
  - ≤ 144 fibers (144 single protectors for single splicing)
- Drawer front sliding and 45 deg. tilting
- · Transparent cover to secure fibers
- · Mounting bracket changeable
- · Side cable fixation

#### **RSB** rack mounting



300mm rack rear mounting



Add a tie bracket for rear mounting



Adjustable mounting depth.


Turn the mounting


bracket around




19 inch front mounting












Wall cabinet, rear entry

#### **RSB** splicing scheme

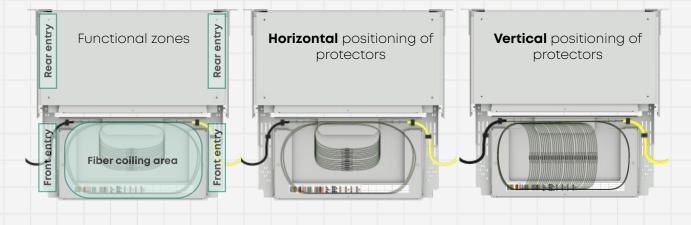







#### **Splicing scheme**

The RSB splicing scheme is versatile, accommodating all types of coiling and splice protectors.




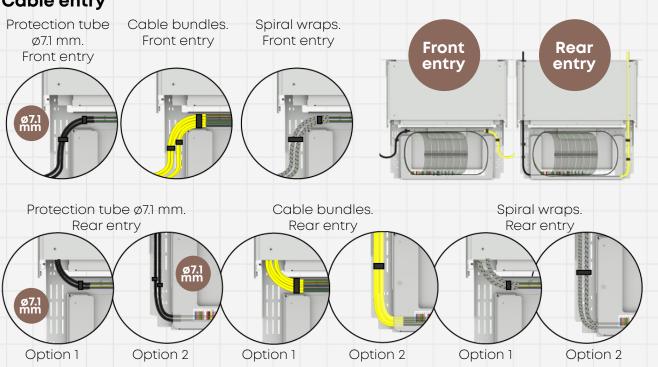




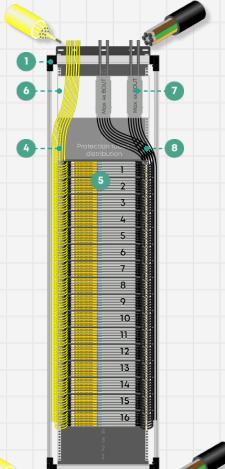






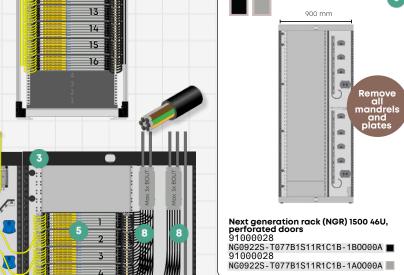











You will also need various small items; please check with your seller.

# Ordering information


**RSB** 




**RSB** cable fixations



Splice holders on adhesive tape





# Featuring new accessories

#### Stackable breakout box









#### **Cable preparation**


- Fix cable on to the box using cable ties
- 2 Protect fibers on cable opening
- Fix central strength member if exist
- Spread fibers or inner tubes across protection tubes

#### **Properties**

- · 2U width, 5U height
- One box can be mounted onto another
- Supports up to 12x Ø7.1 mm protection tubes per box
- Supports multiple cable breakout configurations
- Various installation possibilities: in ODF, in 19 inch cabinets, wall cabinets and more
- · 3x central strength member








#### **Installation variants**

- Outside racks → can be mounted on basket trays, raceways or flush on a wall, underneath or above racks
- Inside the ODF → using 300mm section space - up to 5 boxes can be stacked in two rows
- Inside the ODF → on 19 inch inch mounting plate. Up to 4 breakout boxes can be stacked in three columns, totalling 12 boxes.
- Inside 19 inch cabinets → on the side or on the rear, directly on 19 inch profile or using side bracket




19 inch mounting plate


Side bracket





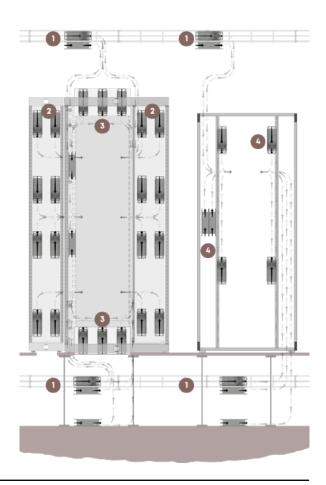

#### Possible configurations of stackable breakout box

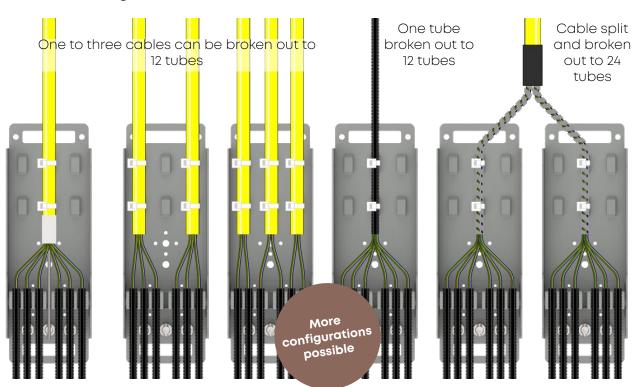


# Featuring new accessories

#### Protection tube ø7.1



#### **Properties**

- Supplied on 100 m spool
- Outer diameter ø7.1 mm, inner diameter ø5.0
- Can be fixed on all LISA cassettes
- Less flexural rigidity, higher capacity and flexibility compare to Ø5.0 mm tube
- Imflammable
- High capacity








Flat ribbon 12f








Maximum capacity







#### Labeling clip for protection tube ø7.1mm



#### **Properties**

- · Easily attachable/detachable
- 100 pcs supplied in a recyclable paper bag
- · Various marking options




#### Marking options\*



\*marking labels are not included, just demonstrated as examples

#### Fixing clip for standard cassette



# no fixing clip with fixing clip

LISA ribbon cassette LISA legacy cassette

#### **Properties**

- To fix Ø7.1 mm protection tube to a standard cassette
- · One bag contains 10 left and 10 right clips
- · Secured with a blue clip



LISA legacy cassette


# **Ordering information**


#### Stackable breakout box



Stackable breakout box mounting plates

Protection tube accessories















# A strong network starts with a strong team

Looking to take your fiber infrastructure to the next level?

Our Ribbon end-to-end solution offers the highest density, maximum efficiency, and seamless scalability.



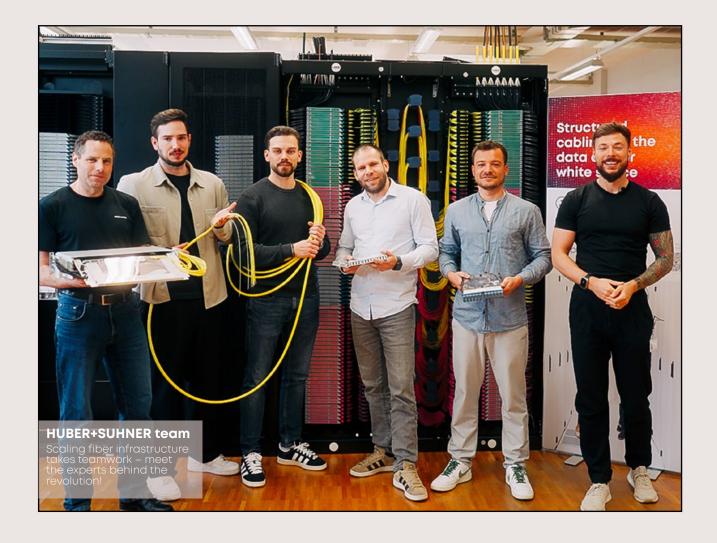



#### **About HUBER+SUHNER**

We are a leading global supplier of components and systems solutions. With our broad range of products and deep know-how, we serve the industry, communications and transportation markets with applications from the three technologies of radio frequency, fiber optics and low frequency. And as a global company with a presence in over 80 countries, we stay close to our customers. Always.

HUBER+SUHNER AG
Degersheimerstrasse 14
9100 Herisau
Switzerland
Phone +41 71 353 41 11
hubersuhner.com

HUBER+SUHNER is certified according to EN(AS) 9100, ISO 9001, ISO 14001, ISO/TS 16949 and IRIS.

#### Waiver