

# INSTALLATION MANUAL

**HUBER+SUHNER AG**  
Fiber Optics  
Fiber Management Systems


DOC-0000418343 Rev C  
Date: 22/08/2016

Page 1 of 2

## Home Fibering System OTS Flush mounted

### Table of contents

- ASSEMBLY INSTRUCTION ..... 1

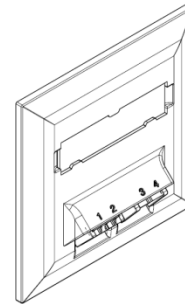


### ASSEMBLY INSTRUCTION

#### Scope of delivery:

- OTS Flush mounted with HOFIS Packaging

#### Required tools:

- Screwdriver (Philips-head)

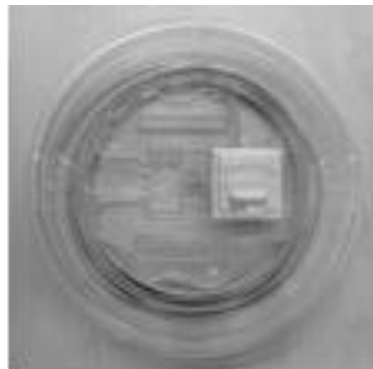

#### Step 1

For a simple unrolling of the cable, stick a screw-driver or a small pole into the hole of the Home Fibering System.

Take the outer end of the cable and start installation to direction of floor-distributor (FD) or building-entry-point (BEP).


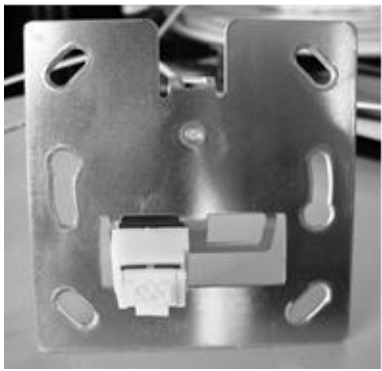



#### Step 2

Unroll the cable completely

At the end open the two half-shell...



<b>Step 3</b>	<p>Pick the OTS Housing out of the packaging. Bend the incoming cable with the Alu part to a 90° Angle as shown in the picture.</p>	
<b>Step 4</b>	<p>If you want to mount the Alu Plate to the wall, you have to pick away the plastic part.</p> <p>After fixing the Alu Plate to the wall, you can fix the plastic cover with the screw.</p>	
<b>Step 5</b>	<p>At the end you can put in the pater for identification and the transparent plastic.</p> <p>(Template for labeling-strip see <a href="http://www.fiberinthehome.com">www.fiberinthehome.com</a> )</p>	
<b>Step 6</b>	<p>For recycling stack the half-shell into each other and bring them to the next waste removal station</p>	