

## EDR Delta<sup>3</sup> enhanced active rack

### Description

- Rack configured in standard centre frame layout (option "C")
- Assembly includes:
  - Centre frame assembly with PDU mounting brackets
  - 2 × pairs of fully adjustable 19" mounting rails fitted centrally with U labels at front
  - Earth kit
  - Baffle kit
  - Doors hinged LH hinged as standard
  - supplied fully assembled and palletized as standard
  - Plain top panels with the exception of an enhanced brush strip entry panel fitted at rear
  - 80% vented server door front and 80 % plain vented door fitted rear
  - Fitted with standard multi point locking swing handles
  - 2 × pairs side panels



### Technical data

#### Construction

Description	Size
Dimensions (W x H x D)	600mm x 47U x 1200mm

#### Mechanical data


Characteristics	Values
Static load rating	1500kg
Material	Aluminium, powder coated steel plate
Weight	130.3kg
Colour	Aluminum extrusion: silver Covers: Black (RAL 9005) or Light Grey (NCS1502-Y)
Ingress protection degree (EN60529)	IP 20

#### Environmental data

Characteristics	Values
Material flammability	UL 94-V0 rated
Halogen free	yes
UV resistance	resistant
Chemical resistance	good
RoHS requirements	fully compliant

## EDR Delta<sup>3</sup> enhanced active rack

### Technical drawing

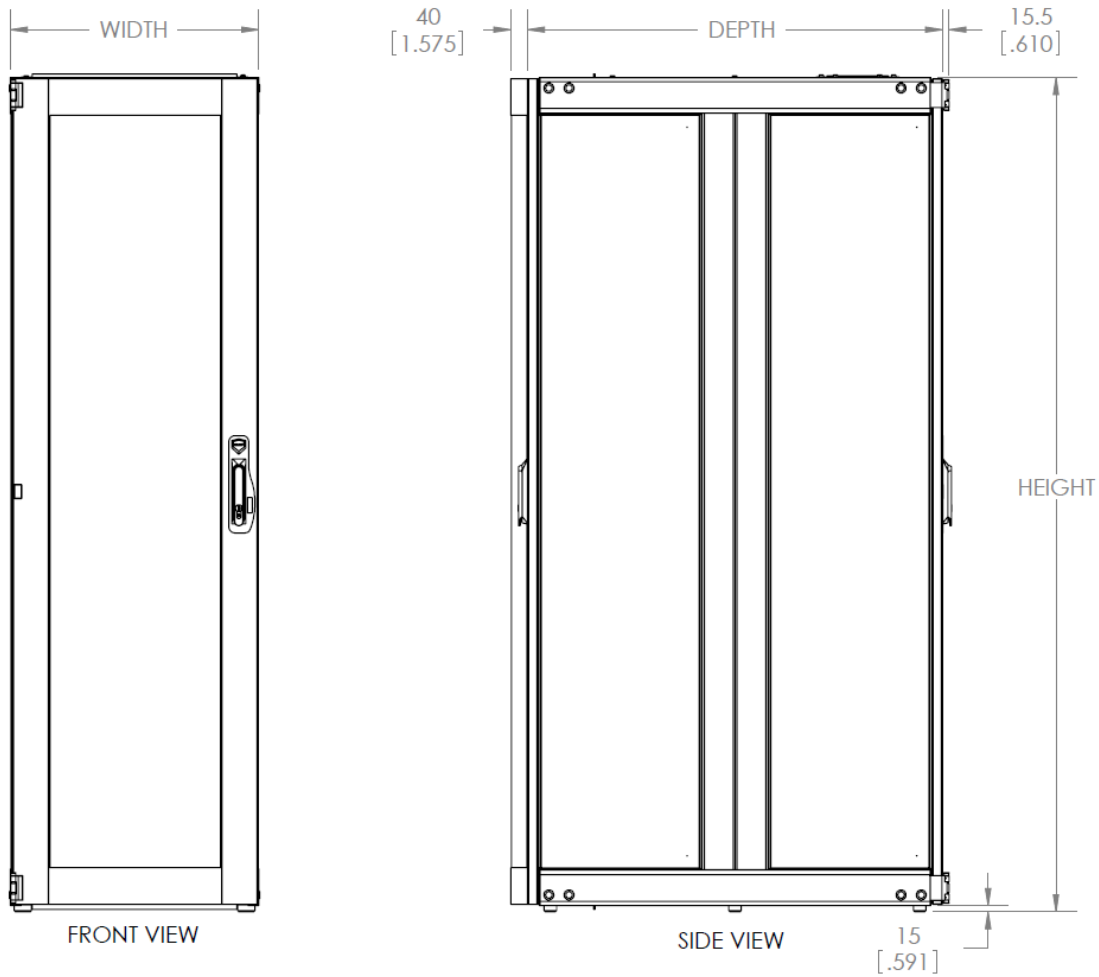

Height: 2236.3 [88.043]  
 Width: 600 [23.622]  
 Depth: 1200 [47.244]

### Ordering information

#### Delta<sup>3</sup> enhanced active rack

Description	Item number
EDR active rack (with sides), 47U x 600 x 1200 mm, black	85032454
EDR active rack (with sides), 47U x 600 x 1200 mm, grey	85073327