

## PCDS\_LCMP\_LCMP\_O318E\_XX.X\_MM

### Description

Duplex patch cord, LCD push-pull to LCD push-pull, MM, duplex fig.8 2x1.8mm\_XX.X\_turquoise, OM3 BendOptimized, A-B / B-A



Features	Features
- Push-pull mechanism for best handling and high packing density	
- One-piece design for easy termination	
- Short rigid length	
- Switchable duplex connectors	

### Technical Data

#### General Data

Description	Values
General Typ	Duplex LC patch cord
Operation temperature	-25 up to 70°C
Polarity	A-B / B-A straight polarity (standard)
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

#### Connector left


Description	Values
Connector typ	LC duplex Push-Pull
Polish	UPC
Color Housing	Black
Color Clip	Aqua
Color Boot	Black
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	M
Insertion loss 97% dB / mean dB	0.25 / 0.12
Return Loss	>35dB
Durability	1000
Tensile load	2 x 100 N
Tensile load acc. To GR-326-COR	Fullfilled

#### Cable

Description	Values
Cable typ	Duplex Cable Figure 8
Fiber count	2
Fiber	2 x 0.9mm
Fiber typ	G50/125-OM3 BendOptimized
Outer diameter	1.7 mm
Outer jacket material	Jacket material according to UL 94V-0

## PCDS\_LCMP\_LCMP\_O318E\_XX.X\_MM

### Technical Drawing

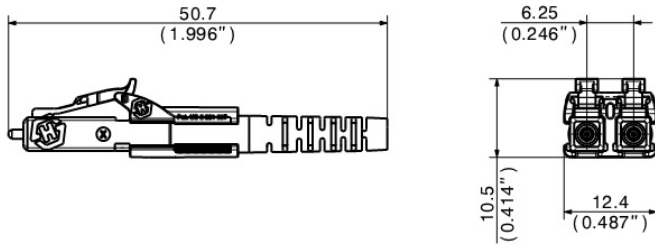

### Ordering information

Meter (m)	Item number	Description
1.0	85012996	PCDS_LCMP_LCMP_O317E_01.0_MM
2.0	85030904	PCDS_LCMP_LCMP_O317E_02.0_MM
3.0	85012997	PCDS_LCMP_LCMP_O317E_03.0_MM
5.0	85012998	PCDS_LCMP_LCMP_O317E_05.0_MM
6.0	85030905	PCDS_LCMP_LCMP_O317E_06.0_MM
7.0	85012999	PCDS_LCMP_LCMP_O317E_07.0_MM
10.0	85013000	PCDS_LCMP_LCMP_O317E_10.0_MM
15.0	85030906	PCDS_LCMP_LCMP_O317E_15.0_MM
20.0	85030907	PCDS_LCMP_LCMP_O317E_20.0_MM