


Fixing Latch

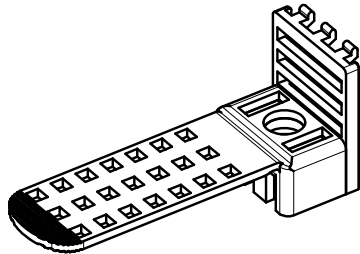


Characteristics

- Fixable to ACS base plate or routing plate
 - Useable in Optibox 16 and 32
 - Cable tie openings
- Elastic TPE band for fixing of different cable diameters

Technical data

Attribute	Value
Dimensions (W x L x H)	168 x 90 x 30 mm
Material	TPE / PC
Weight	70 g
Colour	RAL 7024 Graphite Grey
Temperature resistance Celsius (Short term) Fahrenheit	-30° to +60°C, -22° ... +140°F,
Temperature resistance Celsius (Long term) Fahrenheit	-40° to +85°C, -40° ... +185°F,
Flammability rating	UL94 V0
UV resistance	Resistant
Free of halogen	Yes
Chemical resistance	Good
RoHS requirements	Fully compliant

Technical drawing(s)

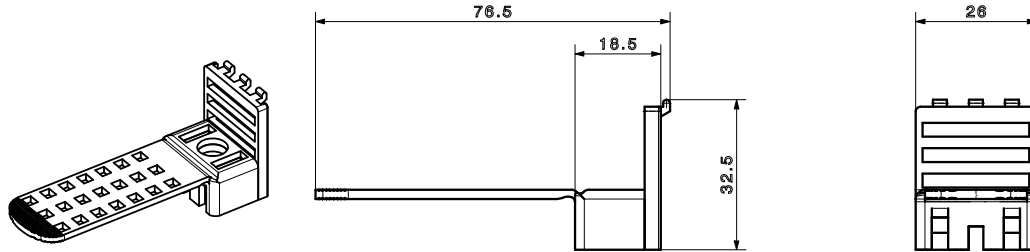

Descriptive code

Item nr.	Descriptive code	Description
84123348	OTB-PC-FIXING-LATCH	Fixing Latch

Additional documents

Document	Doc-no.

HUBER+SUHNER AG
Fiber Optics Division
9100 Herisau
Switzerland
Tel. +41 (71) 353 41 11
Fax +41 41 (71) 353 4647

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 and IRIS.

Note

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.