

## EDR Delta<sup>3</sup> enhanced switch rack

### Description

- Rack configured in standard offset frame layout (option "R")

Assembly includes:

- Offset frame assembly with PDU mtg brackets
- 2 x pairs of fully adjustable 19" mounting rails fitted centrally with U labels at front
- Earth kit
- Baffle kit
- Doors hinged LH hinged as standard
- Supplied fully assembled and palletized as standard
- Enhanced cable entry top panel fitted front and rear with remaining aperture filled with plain panels
- 80 % vented server door front and 80 % double vented door rear
- Fitted with standard multi point locking swing handles
- 2 x pairs side panels



### Technical data

#### Construction

Description	Size
Dimensions (W x H x D)	800mm x 47U x 1200mm

#### Mechanical data


Characteristics	Values
Static load rating	1500kg
Material	Aluminium, powder coated steel plate
Weight	157.7kg
Colour	Aluminum extrusion: silver Covers: Black (RAL 9005) or Light Grey (NCS1502-Y)
Ingress protection degree (EN60529)	IP 20

#### Environmental data

Characteristics	Values
Material flammability	UL 94-V0 rated
Halogen free	yes
UV resistance	resistant
Chemical resistance	good
RoHS requirements	fully compliant

## EDR Delta<sup>3</sup> enhanced switch rack

### Technical drawing

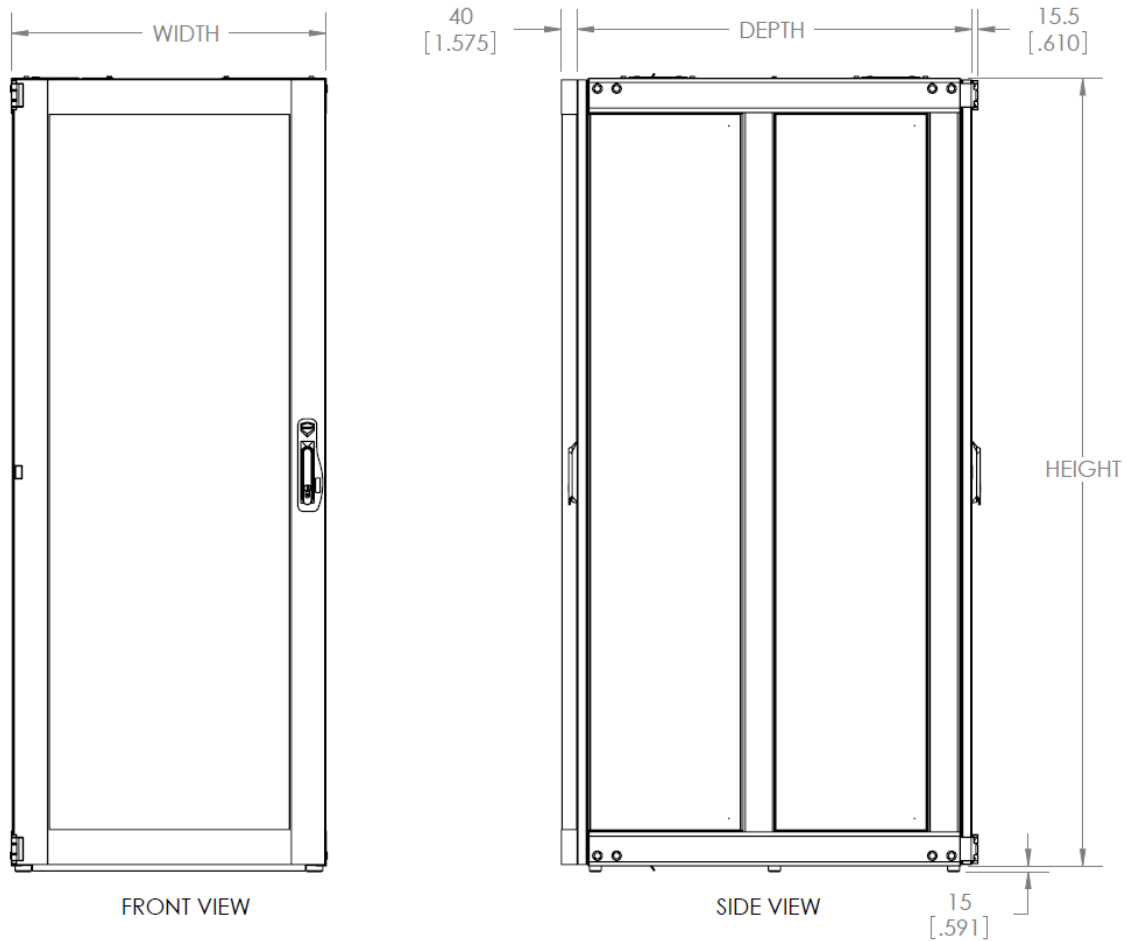

Height: 2236.3 [88.043]  
Width: 800 [31.496]  
Depth: 1200 [47.244]

### Ordering information

#### Delta<sup>3</sup> enhanced active rack

Description	Item number
EDR switch rack (with sides), 47U × 800 × 1200 mm, black	85032455
EDR switch rack (with sides), 47U × 800 × 1200 mm, grey	85073329