

## RF-over-Fiber RFoF6 – 6 GHz

### Description

The RF-over-Fiber Module (RFoF6 – 6GHz) converts analog RF signals into Fiber signals; and also converts Fiber signals to RF signals. The module offers a wide frequency range up to 6 GHz, with excellent stability, frequency jitter and phase noise performance. Rapidly growing use in within communications systems, defence systems, test environments and other high-tech niches.

### Features

- Wide bandwidth from 300 MHz to 6 GHz
- Single Mode with a max. distance of >100 km
- No external control circuits required
- Analog Signal to Optical convert and back

### Applications

- Within communication systems
- Radar applications
- Test environments



### Order Information

Item Description	Item Number
RFoF6 (TX) – 6 GHz	85065392
RFoF6 (RX) – 6 GHz	85065393

### Electrical Data


Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case Temperature T <sub>c</sub> , unless otherwise specified					
Frequency range	MHz	300		6000	
Gain	dB		7		
Gain flatness	dB/100MHz		< 1.5		< 5 @ < 1 GHz
Noise figure	dB		20		
Spurious-free dynamic range	dB Hz <sup>2/3</sup>		100		
Max. input at 1dB compression	dBm		-8		
Max. input power for no damage	dBm		+17		
VSWR (input and output)	dB		1.9		
OIP3	dBm		10		
Time Delay	ns		12		
Supply voltage Transmitter	VDC	+11	+12	+16	Max. 750 mA
Supply voltage Receiver	VDC	+11	+12	+16	Max. 500 mA
Temperature range (OTR)	Operating °C		-40	+85	
	Storage °C		-40	+85	
RF input impedance	ohm	50			
Module weight	kg	1.1			Transmitter and Receiver
Module dimensions	mm	220x100x34			Transmitter and Receiver
RF connectors		QMA / SMA female			Alternative connectors possible

### Optical Data


Parameters		Value			Remarks
		Min.	Typ.	Max.	
All specifications at 25°C case Temperature T <sub>c</sub> , unless otherwise specified					
Fiber optic connectors		Q-ODC 12			Alternative connectors possible.
Fiber		Single mode fiber 9/125 um			
Fiber power loss	dB/km		0.4		
Optical power in fiber	mW	3	6	10	
Side mode suppression ratio	dB	30	40		

## RF-over-Fiber RFoF6 – 6 GHz

### Typical Frequency Response (based on 3 random samples)

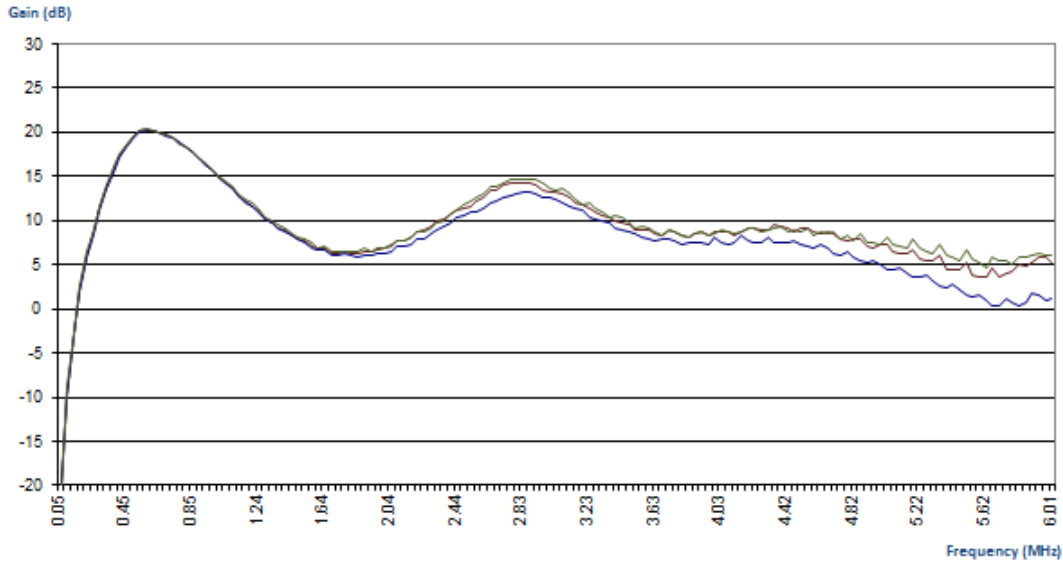

### Dimensions (mm)

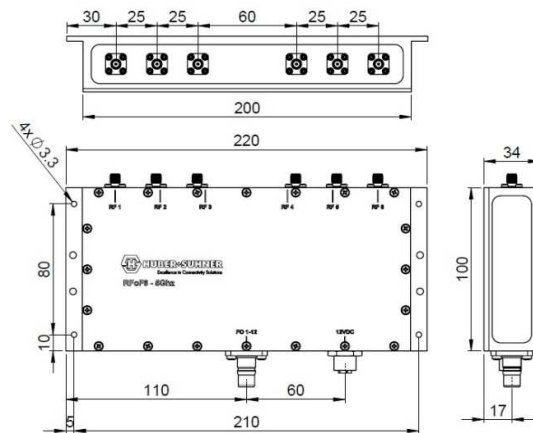

### Additional Information

- All modules are RoHS Compliant.
- All modules are EMC protected.
- DIN 35 brackets are delivered with each module. Other brackets available upon request.
- No MIL Standard with standard module. MIL and other certifications are possible upon request.
- Various racks and enclosures available.

### Application Notes

#### Potential Applications

- Aerospace+Defense applications such as radar systems, naval systems, UAV's and airframe cable systems for aircraft and helicopters.
- Specialised test environments.
- Offshore applications such as communications systems on rigs.

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 and IRIS

[www.hubersuhner.com](http://www.hubersuhner.com)

**Waiver:** It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.