


Data Sheet

SUCOFLEX_Stock Assembly

Description

The SUCOFLEX 101_E high end cable assemblies are designed to provide optimal performance up to 50 GHz where stringent electrical requirements – in particular stability and low loss, are important.

Product description SF101E/11PC24/11PC24/914mm
Item number 85080285

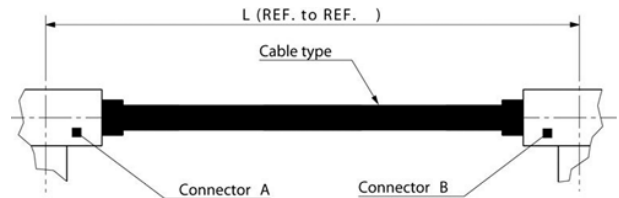

Product Configuration

Cable type	SUCOFLEX_101_E
Length of assembly	914 mm
Connector A	PC24 straight male
Connector B	PC24 straight male

Technical Data

Mechanical Data

Diameter:	3.65 mm
Min. bending radius static	11 mm
Min. bending radius repeated	20 mm
Recommended mating torque (*)	0.8...1.1 Nm

Environmental Data

Operating temperature	- 40°C to + 85°C
RoHS, REACH	Compliant

Electrical Data

Impedance	50 Ω
Operating frequency	up to 50 GHz
Velocity of propagation	77 %
Capacitance	87 pF / m
Time delay	4.3 ns / m

Return Loss	min. 14.9 dB	(up to 50 GHz)
Insertion loss (assembly)	max. 3.89 dB	(50 GHz, 25°C)
Power handling	min. 32 W	(50 GHz, sea level, 25°C)
Insertion loss stability vs. bending (**)	± 0.2 dB	(up to 50 GHz)
Phase stability vs. bending (**)	< 1.2°	(el/GHz)

General Information

(*) H+S torque wrench H+S description: 74_Z-0-0-21 // material/item number: 22543130
 (**) Stability test 360°, diameter 40 mm