

PCDS_LCUP_LCUP_A218E_XX.X_SS

Description

Duplex patch cord, LCD push-pull to LCD push-pull, UPC, duplex fig.8 2x1.8mm_XX.X_yellow, SM G.657.A2, A-B / B-A



Features	Features
- Push-pull mechanism for best handling and high packing density	
- One-piece design for easy termination	
- Short rigid length	
- Switchable duplex connectors	

Technical Data

General Data

Description	Values
General Typ	Duplex LC patch cord
Operation temperature	-25 up to 70°C
Polarity	A-B / B-A straight polarity (standard)
UL Rating	UL 94 V-0
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

Connector left


Description	Values
Connector typ	LC duplex Push-Pull
Polish	UPC
Color Housing	Blue
Color Clip	Blue
Color Boot	Black
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	S
Insertion loss 97% dB / mean dB	0.45 / 0.2
Return Loss	>50dB
Durability	1000
Tensile load	2 x 100 N
Tensile load acc. To GR-326-COR	Fullfilled

Cable

Description	Values
Cable typ	Duplex Cable Figure 8
Fiber count	2
Fiber	2 x 0.9mm
Fiber typ	E9/125-SM G.657.A2
Outer diameter	1.7 mm
Outer jacket material	Jacket material according to UL 94V-0

PCDS_LCUP_LCUP_A218E_XX.X_SS

Technical Drawing

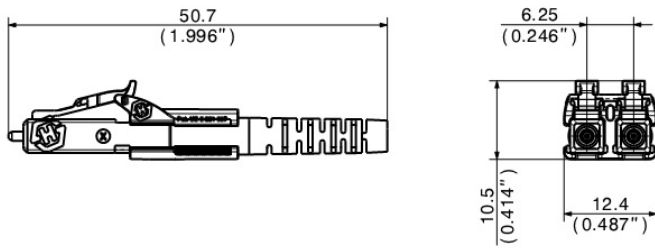

Ordering information

Meter (m)	Item number	Description
1.0	84242867	PCDS_LCUP_LCUP_A217E_01.0_SS
2.0	84242869	PCDS_LCUP_LCUP_A217E_02.0_SS
3.0	84242871	PCDS_LCUP_LCUP_A217E_03.0_SS
5.0	84242873	PCDS_LCUP_LCUP_A217E_05.0_SS
6.0	84242875	PCDS_LCUP_LCUP_A217E_06.0_SS
7.0	84242877	PCDS_LCUP_LCUP_A217E_07.0_SS
10.0	85002046	PCDS_LCUP_LCUP_A217E_10.0_SS
15.0	85020945	PCDS_LCUP_LCUP_A217E_15.0_SS
20.0	85020946	PCDS_LCUP_LCUP_A217E_20.0_SS