


# Data Sheet

## SUCOFLEX\_Stock Assembly

### Description

The SUCOFLEX 126\_E high end cable assemblies are designed to provide optimal performance up to 26.5 GHz where stringent electrical requirements – in particular stability and low loss, are important.

**Product description** PMASF126E/11PC35/11PC35/914mm  
**Item number** 85079122

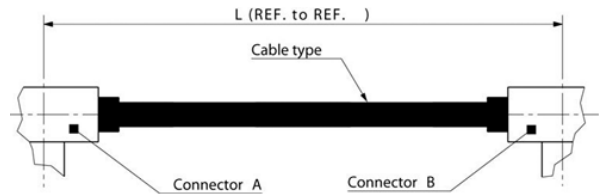

### Product Configuration

Cable type	SUCOFLEX_126_E
Length of assembly	914 mm
Connector A	PC 3.5 straight male
Connector B	PC 3.5 straight male

### Technical Data

#### Mechanical Data

Diameter:	5.5 mm
Min. bending radius static	16 mm
Min. bending radius repeated	25 mm
Recommended mating torque (*)	0.8...1.1 Nm

#### Environmental Data

Operating temperature	- 40°C to + 85°C
RoHS, REACH	Compliant

#### Electrical Data

Impedance	50 Ω
Operating frequency	up to 26.5 GHz
Velocity of propagation	77 %
Capacitance	87 pF / m
Time delay	4.3 ns / m

Return Loss	min. 16.5 dB	(up to 26.5 GHz)
Insertion loss (assembly)	max. 1.64 dB	(26.5 GHz, 25°C)
Phase matched, absolute	± 1.0 ps	
Power handling	min. 160 W	(26.5 GHz, sea level, 25°C)
Insertion loss stability vs. bending (**)	+/- 0.2 dB	(up to 26.5 GHz)
Phase stability vs. bending (**)	< 0.9°	(el/GHz)

### General Information

(\*) H+S torque wrench H+S description: 74\_Z-0-0-21 // material/item number: 22543130  
 (\*\*) Stability test 360°, diameter 55 mm